



**PIN ASSIGNMENT**

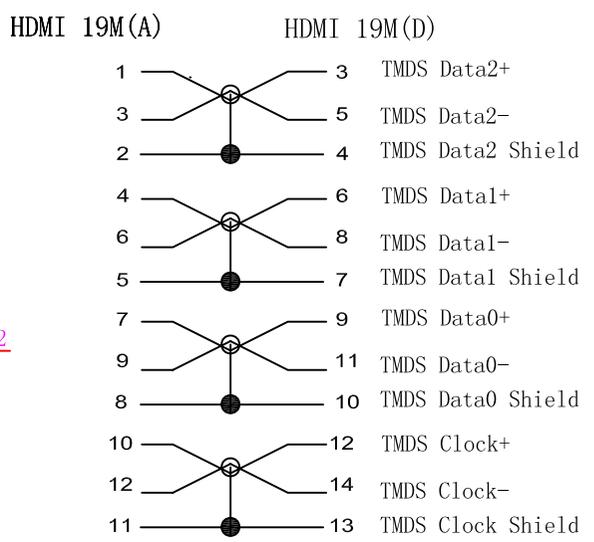

**PIN ASSIGNMENT**

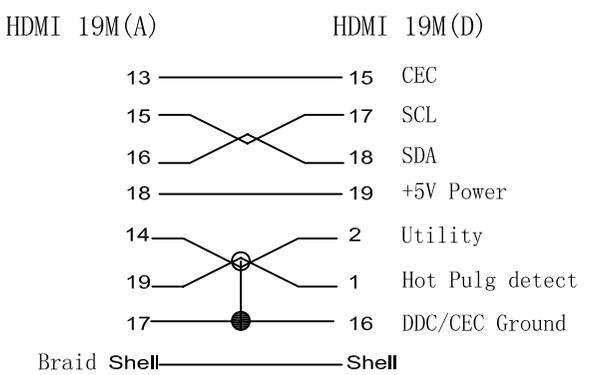

ROHS Compliant

8												
7												
6												
5	Nut		2	PCS	TOLERANCE OTHERWISE UNLESS SPECIFIED			TITLE	HDMI AF To DM			
4	65P Black PVC		2	PCS		DRAW:						
3	HDMI DM, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HDM3)		1	PCS	UP TO 5	±0.2	CHECKED:		PART NO.			
2	HDMI AF, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HAF3)		1	PCS	ABOVE 5 --30	±0.3	APPROVED:		DRAW NO.			
1	Cable: (1P*30AWG+D+AL)*5C+4C*30AWG+AL+D+B OD5.5mm L=5in/12in/24in/6ft Black		1	PCS	ABOVE 30--50	±0.4						
					ABOVE 50	±0.5						
NO	Description		Q' TY	Unit	ANGLE	±3°	DATE	2016-07-26	SCALE	1:1	UNIT	mm

www.USBFireWire.com