

1

2



3

4

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Cable Diameter: 5.0 to 6.0 mm
3. Recommend Gland Nut Torque: 9.0 to 10.0 Kgf-cm.
4. RoHS Compliant

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 04/24/12	Lucas 04/24/12	Ray 04/24/12

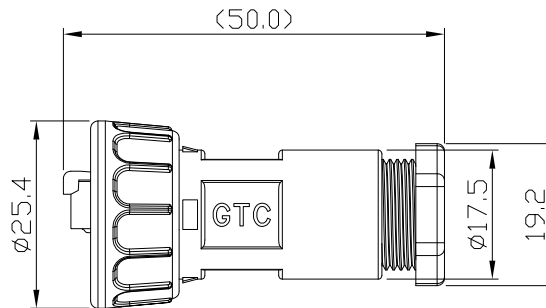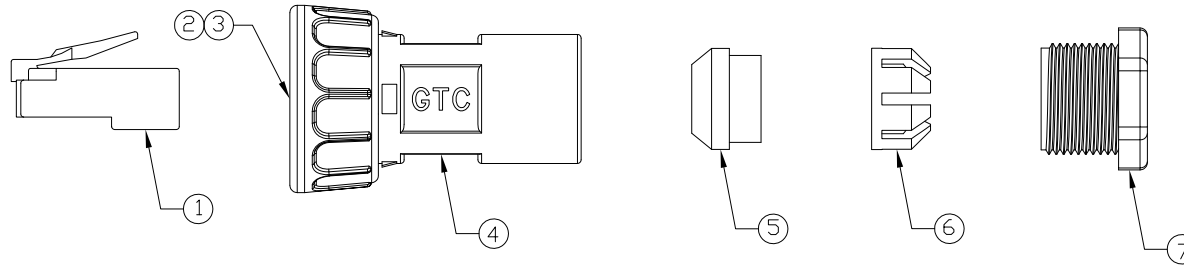

DOC.CENTER.ISSUE
 APR.25.2012
 ONLY FOR
 RELEASE

Item	Part Name	Material / Finish	Q'ty
7	Gland Nut	Thermoplastic Color: Black	1
6	Cage	Thermoplastic Color: White	1
5	Gland	Silicone Color: Green	1
4	Housing	Thermoplastic Color: Black	1
3	Screw Nut	Thermoplastic Color: Black	1
2	Rubber Pad	Silicone Color: Black	1
1	RJ45 Plug	Housing: Thermoplastic, Color: Clean Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1

TITILE RJ45 C3 Plastic Shielded Easy Field Installable Cable End Plug Screw						DRAWING NUMBER RR-125360-00			REV. A0	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	
	B	1:1	Joyce 04/24/12	Lucas 04/24/12	Ray 04/24/12	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019

1

2

3

4