

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Suitable Cable OD= 8.0 mm to 12.5 mm
- 3. Recommend Cover Torque: 9 to 10 kgf-cm.
- 4. Recommend Gland Nut Torque: 15 to 20 kgf-cm.
- 5. RoHS Compliant.
- 6. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.



RR-272254-32050_REV:XX_QTY:1PCS
LOT: XXXX
Made in China

- 7. 每25PCS產品再用無Logo PE袋包裝,並將標籤貼於袋外.

RR-272254-32050_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

- 8. 標籤上的REV: 請依照成品圖面版本.
- 9. 不可使用夾鍊袋.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-210717	Housing Material PUR => PVC	Joyce 07/23/21	Lucas 07/23/21	Ray 07/23/21

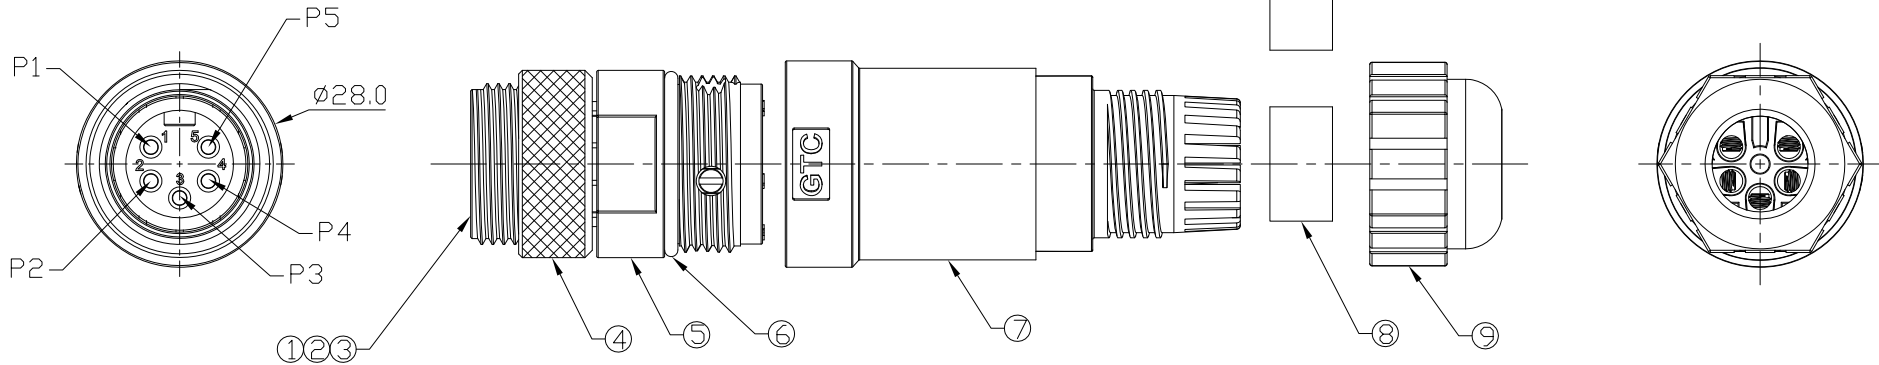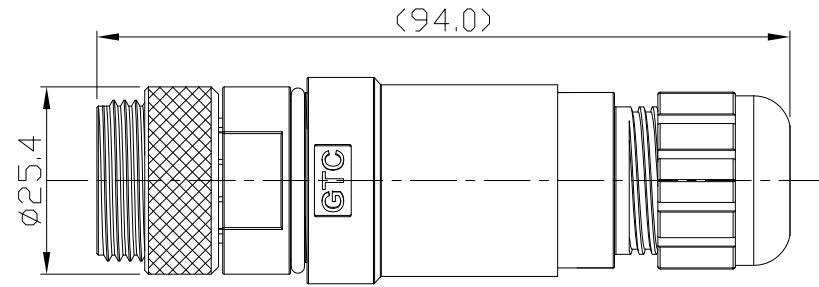

5	Base	Thermoplastic Color: Black	1				
4	Screw Nut	Copper Alloy Finish: Ni Plated	1	9	Gland Nut	Thermoplastic Color: Black	1
3	Screw	S15C Finish: Ni Plated	5	8	Gland	NBR ; ID=8.5mm*1 , ID=13.0mm*1 Color: Black	2
2	Contacts	Copper Alloy Finish: Au Plated	5	7	Cover	Thermoplastic Color: Black	1
1	Housing	PVC Color: Black	1	6	O-Ring	Silicone Color: Black	1
Item	Part Name	Material / Finish	Q'ty	Item	Part Name	Material / Finish	Q'ty

GTC
 DOC.CENTER.ISSUE
 JUL.23.2021
 ONLY FOR
 RELEASE

TITLE: Mini 8A 5P Field Installable Cable End Male Screw-In
 DRAWING NUMBER: RR-272254-32050
 REV.: 02

	B	1:1	Whitney 06/19/18	Lucas 06/19/18	Ray 06/19/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING:

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019