


DESCRIPTION CONTROL				
REV	DESC	DATE	APP	
J	△	12.03.22	N21203140	
K	△	12.08.20	N21208074	

反面有 USB LOGO 字板 


NOTE: △  
MINI USB 5P 內外模都要用 PVC 料 ①  
成型, 插頭外露仍然要保持 7mm

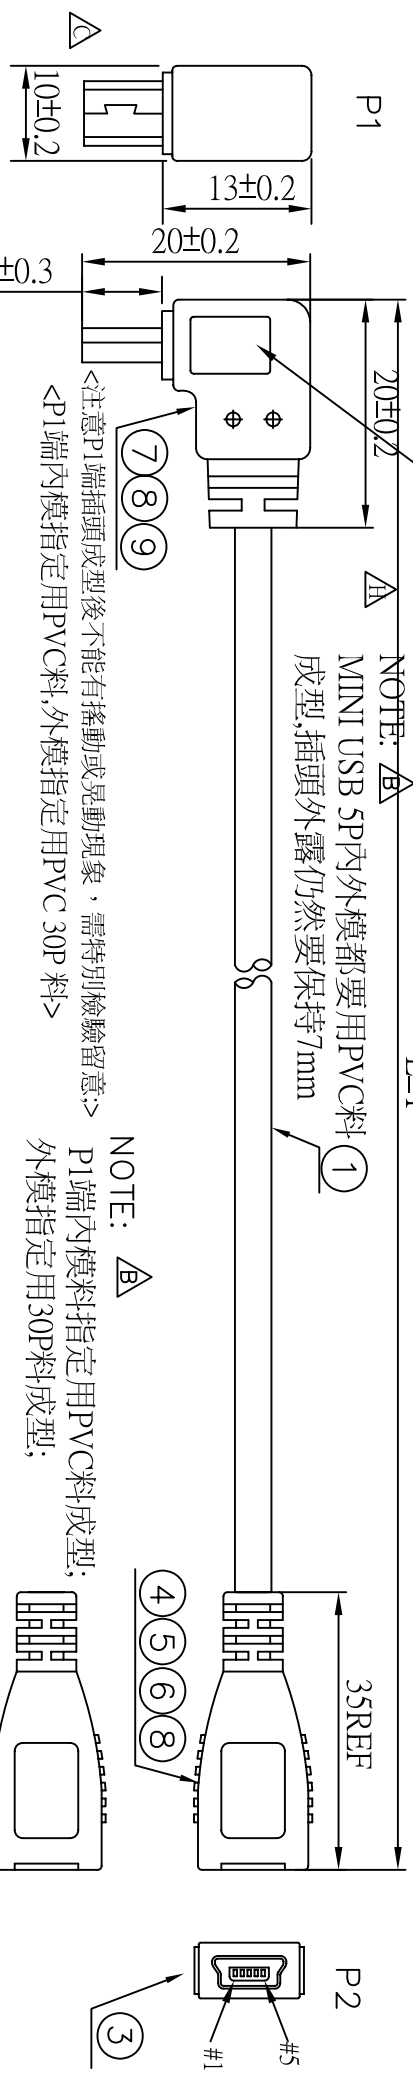

<注意 P1 端插頭成型後不能有搖動或晃動現象, 需特別檢驗留意>  
<P1 端內模指定用 PVC 料, 外模指定用 PVC 30P 料>

NOTE: △  
P1 端內模料指定用 PVC 料成型;  
外模指定用 30P 料成型;

CUSTOMER P/N	Y-S P/N	L±T	M	PE BAG: L**W*0.06MM	TIE-A/BK10
RR-2MBR02EXT-12GL5	UB2002023L11076	305±20	0.31	PE BAG: 5**6**0.06MM	80*1
RR-2MBR02EXT-24GL5	UB2002023L21076	610±20	0.62	PE BAG: 5**6**0.06MM	120*1
RR-2MBR02EXT-72GL5	UB2002023L31076	1830±30	1.84	PE BAG: 6**8**0.06MM	
RR-2MBR02EXT-4GL5	UB2002023L41076	102±15	0.105	PE BAG: 3**6**0.06MM	
	UB2002023L51076	4572±50	4.57	PE BAG: 7**10**0.06MM	

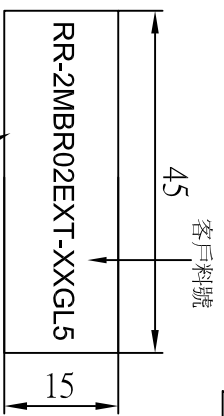

ROHS COMPLIANT

* NO	CARTON: 46*30*25CM	AVR	PCS	* 300010000001	PE BAG: 30**28**0.08MM	A/R	PCS
*	LABEL: 4.5*1.5MM (白底黑字)(如圖所示)(與 PE 袋)	1	PCS	390	PE BAG: L**W*0.06MM	1	PCS
9	PVC-BK10/30	4.7	G	390	TIE-A/BK10	***	MM
8	TUBE-HIT-φ1.0MM (鐘型)	7.0*2	MM		USB-A074		
7	HI TEAMP TAPE: W:6MM	20*1	MM		USB-A073		
6	PE-5521	1.5	G		USB-A357KF		
5	PVC-BK10/50	6.5	G		USB-A358KF		
4	ABS 膠料 <BK10>	2.0	G		USB-A072		
3	MINI-USB-B-S-5PIN(BK)	1	SET				
2	MINI-USB-B-S-5PIN<鐵殼鐵套>	1	SET				
1	12006000005						



THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2019

PIN ASSIGNMENT

P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	4
5 YELLOW	5
S BRAID	S

NO	PART NO.	DESCRIPTION	QTY	UNIT
1	1303051100033	28*1P+24*3C+A+B-BK10 -4.8UT12725	L	M

NO	PART NO.	DESCRIPTION	QTY	UNIT
		DRAW, BY: 葉麗珍		
		CHECK, BY:		
		APP, BY:		
		CUSTOMER P/N: RR-2MBR02EXT-XXGL5		

ALL DIMENSIONS IN mm

ITEM: UB2002023LX1076

SCALE: NONE

DATE: 2008/08/14

CUSTOMER: C331<陸鴻>

REV K