



REV	DESC	DATE	APP
E		09.10.09	N20910069
F		09.11.05	N20911038

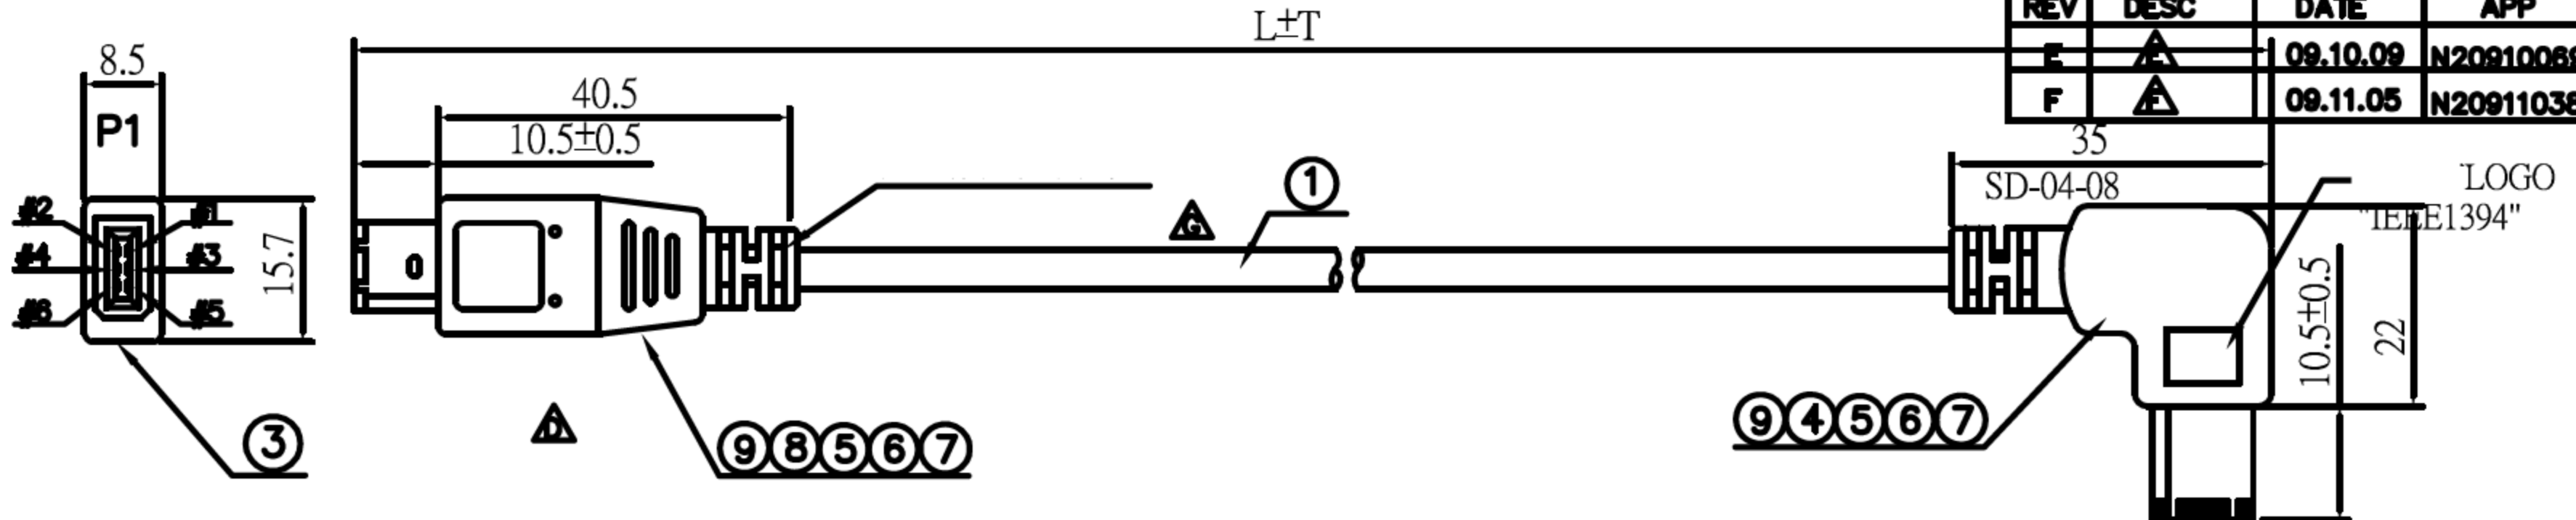


CUSTOMER P/N	Y-S P/N	L±T	M	PE BAG:L*W*0.06MM	TIE-A/BK
RR-6R6S-396G	IE1394100002312	10060±100	10.07	PE BAG:10*12*0.06MM	
RR-6R6S-09G	IE1394100102312	230±20	0.24	PE BAG:5*6*0.06MM	
RR-6R6S-24G	IE1394100202312	610±20	0.62	PE BAG:5*6*0.06MM	80*1
RR-6R6S-72G	IE1394100302312	1830±30	1.84	PE BAG:6*8*0.06MM	100*1
RR-6R6S-180G	IE1394100402312	4570±50	4.58	PE BAG:7*10*0.06MM	

*	390	TIE-A/BK		***	MM
*	390	LABEL:"RR-6R6S-XXXG"45*15MM		1	PCS
*	390	CARTON:46*30*25CM		A/R	PCS
*	390	PE BAG:30*28*0.08MM		A/R	PCS
*	390	PE BAG:L*W*0.06MM		1	PCS
9		PVC-BLACK10/80		14.0	G
8	210010000088	FOIL-CU-6MM		35*1	MM
7	370	HI TEAMP TAPE:W:8MM		40*4	MM
6	370	HI-TEAMP-TAPE:W:6MM		35*2	MM
5	210	TUBE-HT-∅1.5MM		12.0*2	MM
4	370	FOIL-AL-20MM		40*1	MM
3	370	IEEE1394-6P<BLACK><MOLDING TYPE>		1	SET
2	110111006023	IE1394-6P<BK>		1	SET
1	1308061100041	30/22-(1P+A+B)*2/2C+MYLAR+A+B -BK10-5.5U20276		L	M
NO	PART NO.	DESCRIPTION		QTY	UNIT


NOTE:
1.P1

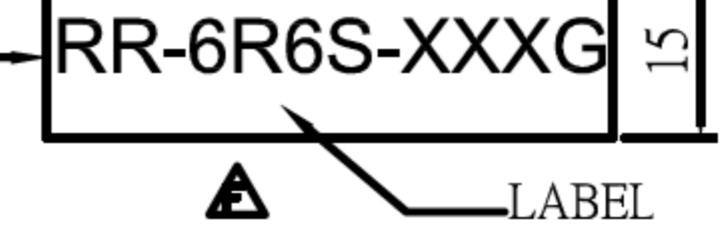

RoHS COMPLIANT

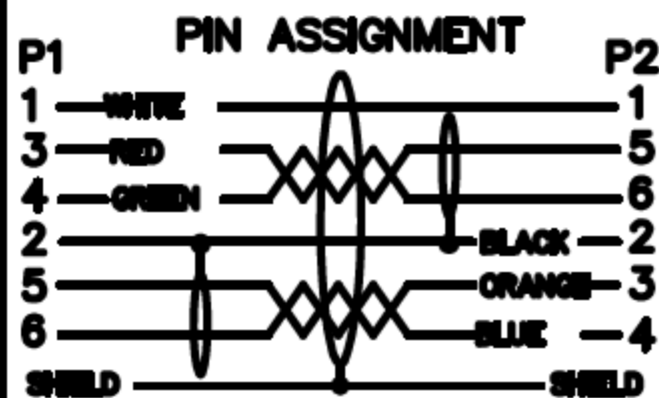

www.USBFireWire.com

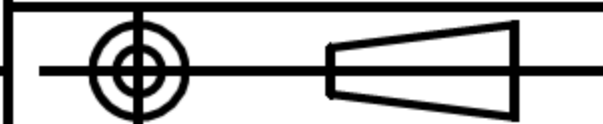

ITEM: **IE1394100X02312**

REV
G

DRAWN, BY: ZYJ

SCALE: NONE

DATE: 2009-08-18

CHECKED, BY:

CUSTOMER: C331

PAGE: 1/1

APP'ED, BY:

CUSTOMER P/N: RR-6R6S-XXXG

ALL DIMENSIONS IN mm