


FILE NO: UB-01665

DESCRIPTION CONTROL		
REV	DESC	DATE
		ECN NO.

PLASTIC TONGUE (BLACK SHADED AREA)

New Braid Ass'y Way

L±T

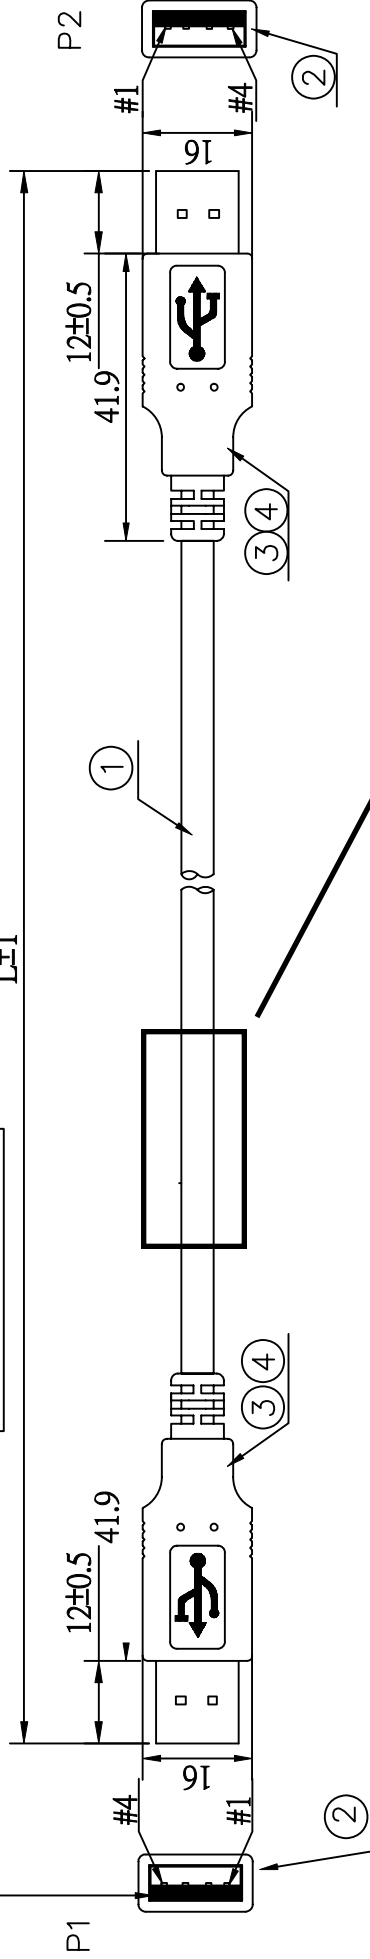

LENGTH +/- TOLERANCE  
 25FT = 300 +/- 10  
 50FT = 600 +/- 20  
 75FT = 900 +/- 30  
 100FT = 1200 +/- 50  
 (LENGTH IN INCHES)

INCLUDE 2 FERRITE BEADS ON EACH CABLE,  
 3.0 INCHES +/- 1.0 INCH

ROHS COMPLIANT

NO	TYPE	DESCRIPTION	QTY	UNIT
* 220030000363	TIE - BK10		80*1	MM
* 300030000193	PE BAG: 5" * 6" * 0.06MM		1	PCS
*	LABEL		1	PCS
*	CARTON: 46 * 30 * 20CM		A/R	PCS
*	PE BAG: 30" * 28" * 0.08MM		A/R	PCS
4	FOIL - CU - 8MM		26*2	MM
3	PVC - BLACK10 / 50P		13	G
2	USB - A - P <WH> / L <鍍殼鍍金		2	SET
1	UL2725, (1P+2C)+AB-BK10, OD: 3.0(30/30) <REV: 2.0>		L	M

INNER MOLDING	USB-A-01	HT020
OUTER MOLDING		

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART.  
 USBFIREWIRE.com  
 COPYRIGHT © 2019

PIN ASSIGNMENT	ITEM: RR-APEX-XX	SCALE: FREE	DATE: 2014.2.18
P1		CUSTOMER: C333<陸博>	PAGE: 1/2
1	RED	APP, BY:	CUSTOMER P/N: RR-AMX2-XXX
2	WHITE		
3	GREEN		
4	BLACK		
S	BRAID		

ALL DIMENSIONS IN mm