


FILE NO: UB01021-04458

D		11.10.20	N21110099
E		2013-05-13	

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
B		09.11.09	N20911072
C		09.11.25	N20911306

<注意P2端插頭成型後不能有搖動或晃動現象，需特別檢驗留意;>  
460±15

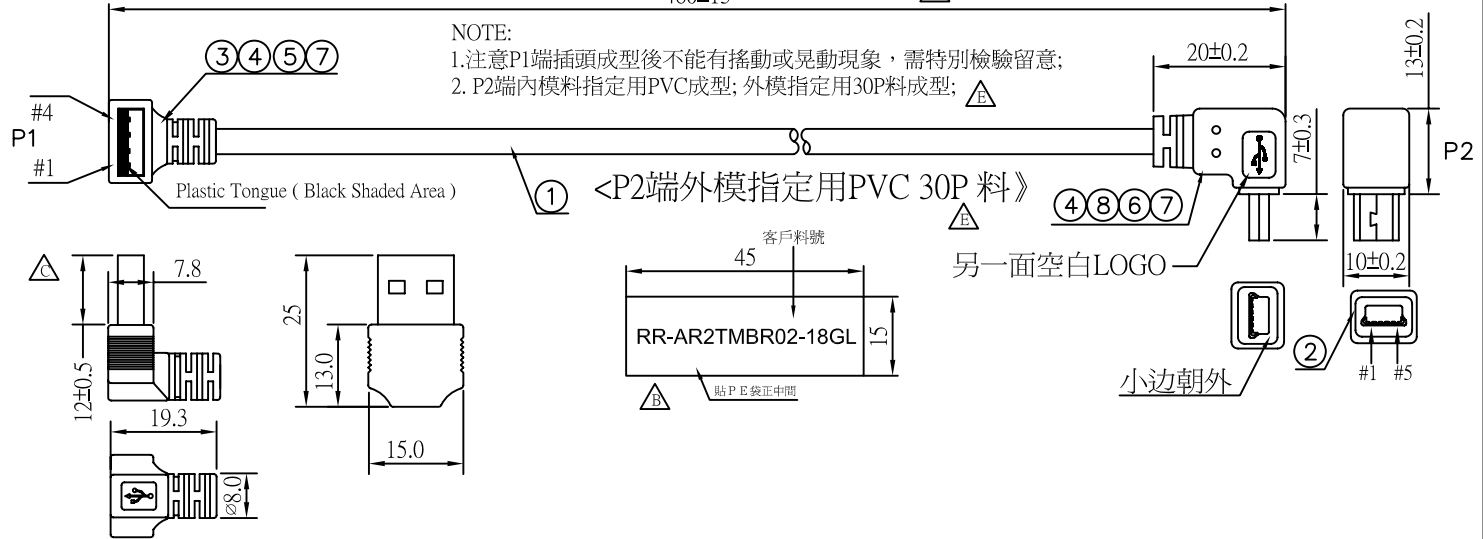

NOTE:  
1.注意P1端插頭成型後不能有搖動或晃動現象，需特別檢驗留意;  
2. P2端內模料指定用PVC成型; 外模指定用30P料成型;

*	330010014746	LABEL:45*15MM <白底黑字>		1	PCS
*	310000000012	CARTON:46*30*25CM		A/R	PCS
*	300010000001	PE BAG:30*28*0.08MM		A/R	PCS
*	300030000193	PE BAG:5*6*0.06MM		1	PCS
*	220030000363	TIE-A/BK10		80*1	MM
8	120010000116	PVC-BK10/30		6.2	G
7	220020000001	PVC-IN		6	G
6	210030000057	HI TEAMP TAPE:W:6MM;		20*2	MM
5	120010000031	PVC-BK10/50		7.2	G
4	230020000001	SOL-WIRE-FULL-TIN-1.0		0.2	G
3	110081304129	USB-A-P<WHITE> (一件式)<鐵殼鍍金>		1	SET
2	110081004126	MINI-USB-B-P-5PIN(BK) (一件式)<鐵殼鍍金>		1	SET
1	130304110000X	28*1P+24*2C+A+B-BK10 -4.8UL-2725 <REV:2.0>		0.47	M
NO	PART NO.	DESCRIPTION		QTY	UNIT

RoHS COMPLIANT

NOTE:  
P2端內模料指定用PVC料成型;  
外模指定用30P料成型; E

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
S	BRAID	S

www.USBFireWire.com

ITEM: UB2001021L04458

SCALE: NONE DATE: 2008.12.18

CUSTOMER: C331<隆瑞>

CUSTOMER P/N:

ALL DIMENSIONS IN mm