


		2012.08.21		N21208076		DESCRIPTION CONTROL			
E	△					REV	DESC	DATE	ECN NO.
F	△	2013.12.03		自然切换					
G	△	2014-03-07		自然切换		H	△	2014.04.28	N2014043352
I	△	2014-06.20							

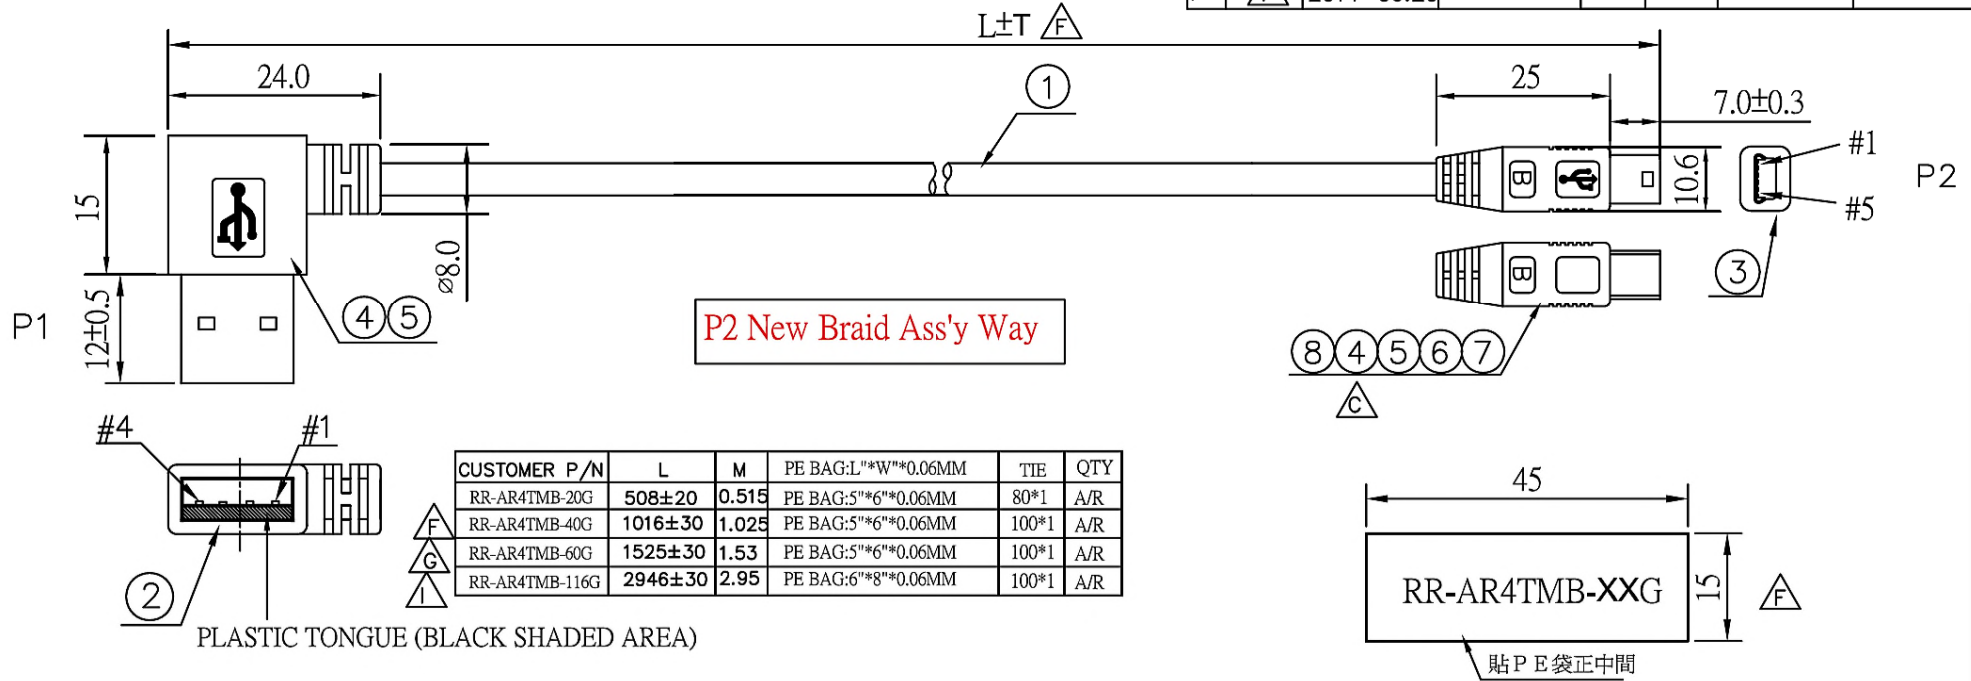


CUSTOMER P/N	L	M	PE BAG:L*W**0.06MM	TIE	QTY
RR-AR4TMB-20G	508±20	0.515	PE BAG:5**6**0.06MM	80*1	A/R
RR-AR4TMB-40G	1016±30	1.025	PE BAG:5**6**0.06MM	100*1	A/R
RR-AR4TMB-60G	1525±30	1.53	PE BAG:5**6**0.06MM	100*1	A/R
RR-AR4TMB-116G	2946±30	2.95	PE BAG:6**8**0.06MM	100*1	A/R

RoHS COMPLIANT

*	220030000363	TIE-A/BK	***	MM	
*	390	LABEL:"RR-AR4TMB-XXG"45*15MM △	1	PCS	
*	31000000001X	CARTON:46*30*HCM	A/R	PCS	
*	300010000001	PE BAG:30**28**0.08MM	A/R	PCS	
*	300030000193	PE BAG:5**6**0.06MM	1	PCS	INNER MOLDING
8	210010000328	FOIL-CU-8MM △	26*1	MM	OUTER MOLDING USB.B-038
7	200034000032	TUBE-HT-φ1.0MM <薄型>	5*3	MM	
6	370	HI TEAMP TAPE:W:6MM	20*1	MM	
5	120010000031	PVC-BK10/50	9.0	G	
4	120020000001	PE-5321	5.5	G	
3	110081004087	MINI-USB-B-5P<BK> <超薄><鐵殼鍍金>	1	SET	
2	110081304129	USB-A-P(WHITE) <一件式,短型> <鐵殼鍍金>	1	SET	
1	130304110000K	28#*1P+24#*2C+A+B-BK10-4.8U2725<REV:2.0><凱寶> △	L △	M	
NC	TYPE	DESCRIPTION	QTY	UNIT	

www.USBFireWire.com

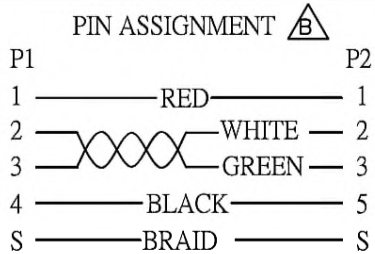

	ITEM: RR-AR4TMB-XXG	REV
	SCALE: FREE	I
	CUSTOMER: C331<陸鴻>	
DRAW, BY: 王瑩	CUSTOMER P/N:	
CHECK, BY:		
APP, BY:		

ALL DIMENSIONS IN mm