

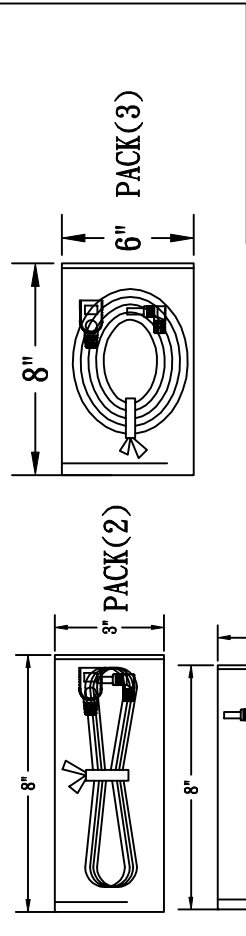


| CHANGE VERSION | REMARKS | C | 11/06/05 | CFM AF TOOLING SIZE |
|----------------|--|---|----------|---------------------------------|
| A | 11/04/30 REL | D | 13/05/24 | REMOVE STICKER, CHANGE PIN 30U" |
| B | 11/05/25 CFM TOLERANCE, CHANGE AF ENCLOSED TYPE | E | | |

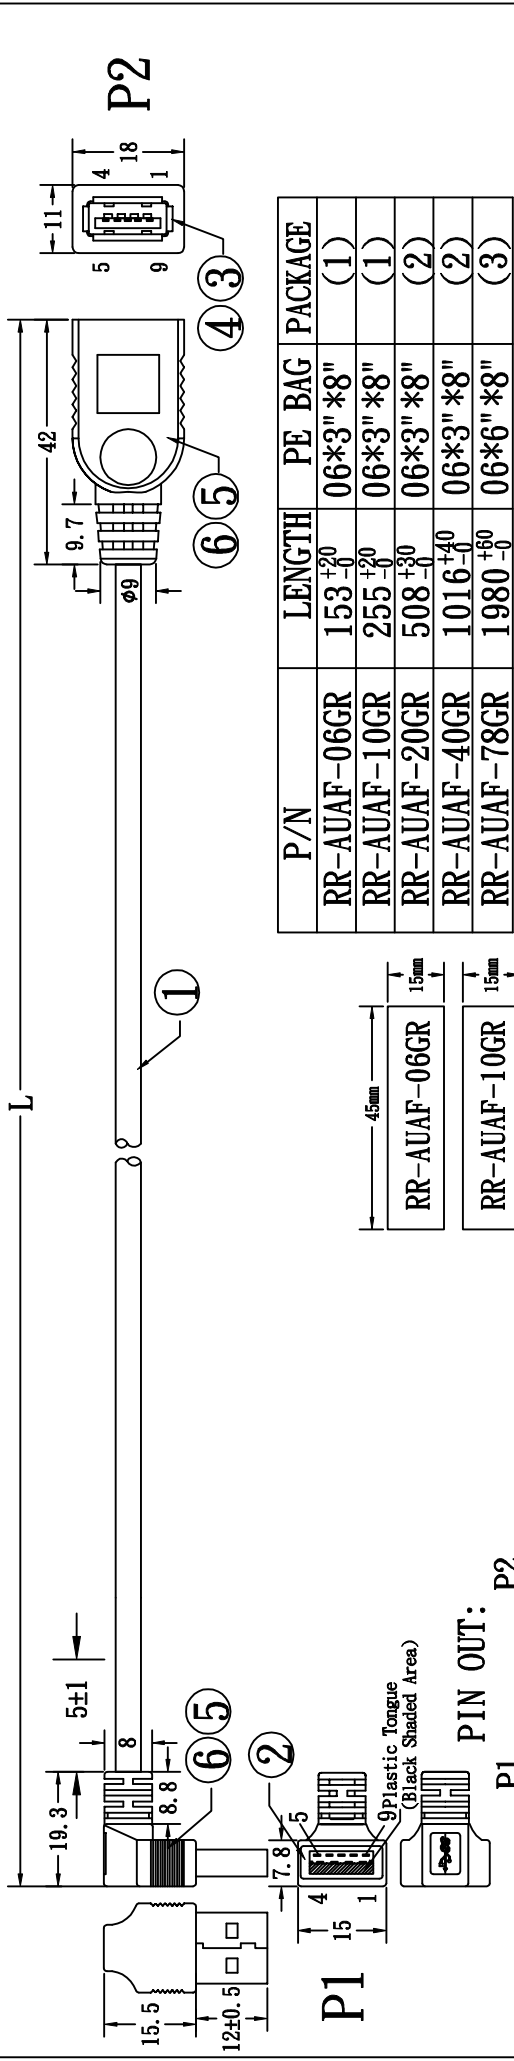

| | |
|-------------|--------------|
| ROHS | DRAWN BY |
| | CHECKED BY |
| | CONFIRMED BY |
| | CHECKED BY |

| | |
|----------------------------|--|
| www.USBFireWire.com | |
| MOLD TOOL NO. | US3.0 AM(UP) A110-625-001 B120-297-001 "A" TYPE 3.0 F A110-668-001 B120-334-001 |
| SCALE | UNIT |
| FILE NAME | CUSTOMER |
| DATE | CUSTOMER P/N |
| 13/05/24 | |

| NO. | P/NAME | DESCRIPTION | Q' TY |
|-----|----------|---|-------|
| 1 | WIRE | UL20276 [28AWG(7/0.12 TC)*1P+1+AL+MYLAR]*2C+28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(BC)+80B(AM) OD:5.5±0.15 BLACK(B792) USB3.0 VERSION | 1 |
| 2 | PLUG | USB3.0 "A" TYPE MALE GOLD PLATED PIN=30u" SHORT TYPE | 1 |
| 3 | PLUG | USB3.0 "A" TYPE MALE GOLD PLATED PIN=30u" | 1 |
| 4 | TINPLATE | USB TINPLATE | 1 |
| 5 | PVC | LD PE | 4g |
| 6 | PVC | 45P BLACK(B792)PVC | 14g |
| 7 | PACKAGE | 1PCE/PE BAG:06*A"*B", + P/N STICKER | 1 |

| MATERIAL LIST : | |
|-----------------|-------------|
| NO. | DESCRIPTION |
| PIN OUT: | P2 |
| 1 | RD |
| 2 | WH |
| 3 | GN |
| 4 | BK |
| 5 | BL |
| 6 | YL |
| 7 | SDP DRAIN |
| 8 | PR |
| 9 | OR |
| S | S DRAIN |
| PIN OUT: | P1 |
| 1 | RD |
| 2 | WH |
| 3 | GN |
| 4 | BK |
| 5 | BL |
| 6 | YL |
| 7 | SDP DRAIN |
| 8 | PR |
| 9 | OR |
| S | S DRAIN |