


DESCRIPTION CONTROL			
REV	DESC	DATE	ECN NO

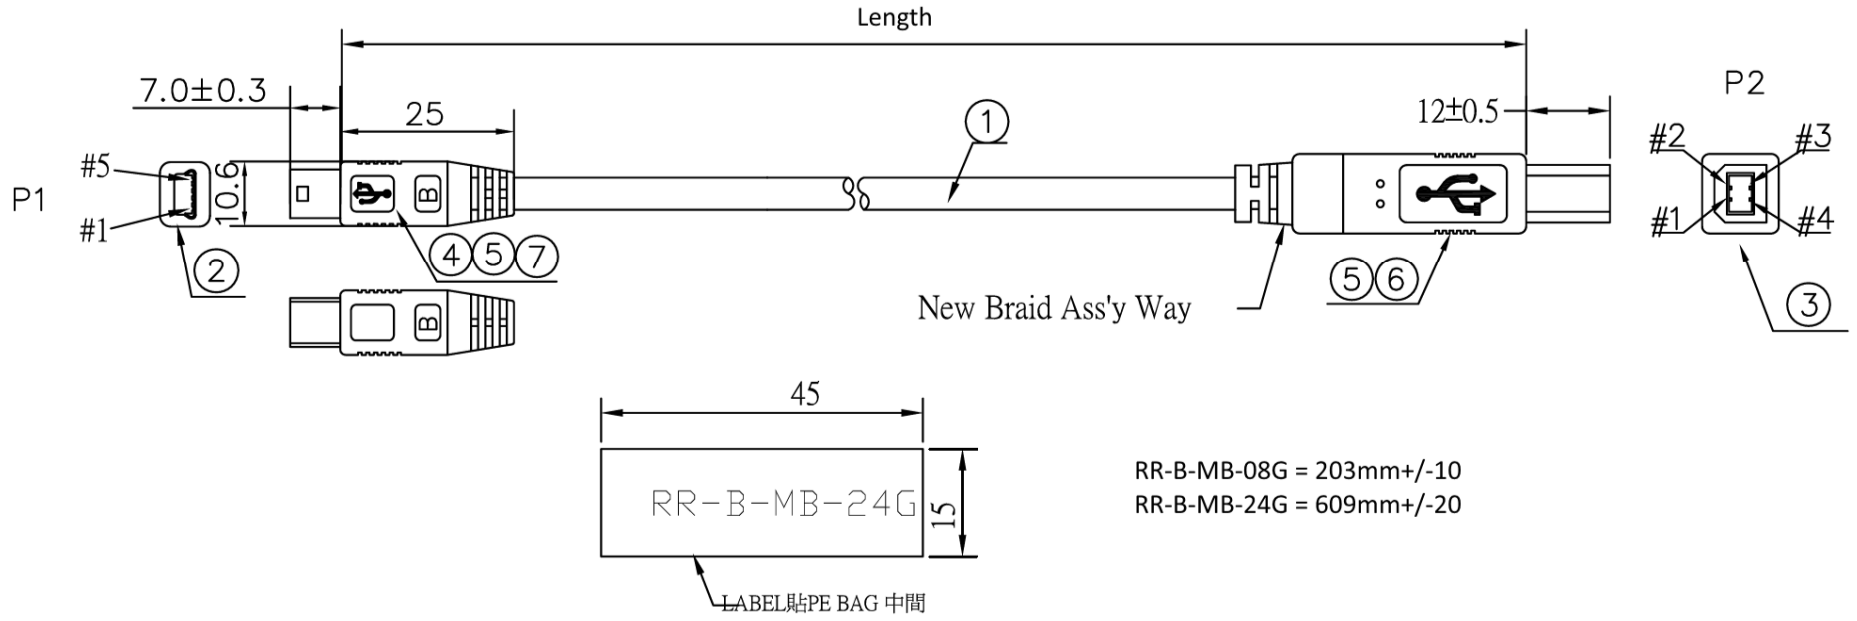


RR-B-MB-08G = 203mm+/-10
 RR-B-MB-24G = 609mm+/-20

*	31000000001	CARTON: 46*30*20CM	A/R	PCS
*	30001000000	PE BAG: 30"*28"*0.08MM	A/R	PCS
*	30003000000	PE BAG: 5"*6"*0.06MM	1	PCS
*		LABEL: "RR-B-MB-24G "45*15MM	1	PCS
7	21003000005	HI TEAMP TAPE: W: 6MM	20*1	MM
6	21001000032	FOIL-CU-8MM	26*2	MM
5	12001000003	PVC-BK10/50	9.2	G
4	20003400020	TUBE-HT-Ø1.0MM(薄型)	5*3	MM
3	181-041033-C	USB-B-P<WHITE> <鐵殼鍍金>	1	SET
2	110081004087	MINI-USB-B-5P<BK><超薄><鐵殼鍍金>	1	SET
1	1303041100003	28#*1P+24#*2C+A+B-BK10-Ø4.8 UL2725<REV: 2.0> 慶龍或同級品	0.609	M
NO	TYPE	DESCRIPTION	QTY	UNIT

RoHS COMPLIANT

INNER MOLDING			
OUTER MOLDING	USB.B02	USB.B-038	

www.USBFireWire.com

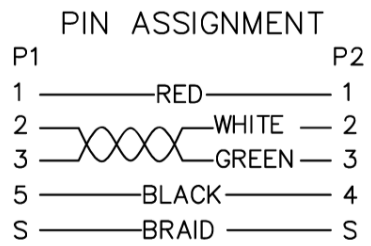

ITEM: RR-B-MB-XXG	REV	
	R	
DRAWN BY:	SCALE: NONE	DATE: 2014.02.26
CHECKED BY:	CUSTOMER: C331<陸鴻>	PAGE: 1/1
APPROVED BY:	CUSTOMER P/N:RR-B-MB-24G	
ALL DIMENSIONS IN mm (UNLESS OTHERWISE SPECIFIED)		