

Notes: (Unless Otherwise Specified)



1. Waterproof Rate: Unmated IP67 Δ
2. Recommend Panel Thickness: 0.8 to 3.0 mm.
3. RoHS & REACH Compliant.
4. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-111443-AMX2-40_REV:XX_QTY:1PCS
LOT: XXXX
Made in China


5. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.

RR-111443-AMX2-40_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

6. 標籤上的REV: 請依照成品圖面版本.
7. 不可使用夾鍊袋.
8. 螺絲與灰紙板單獨用汽泡袋包裝.

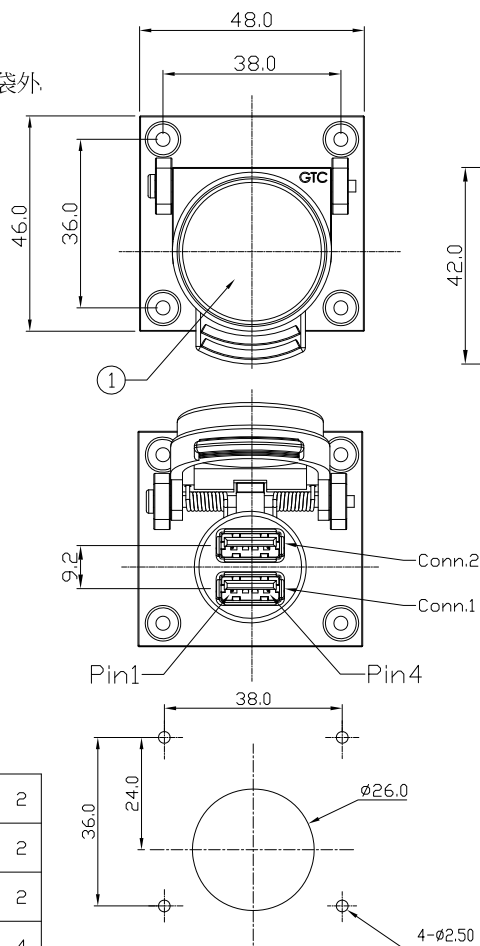

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-180701	Change Item 1 : Cap => Dust Cover ; Modify Waterproof Rate Δ	Whitney 07/03/18	Lucas 07/03/18	Ray 07/03/18

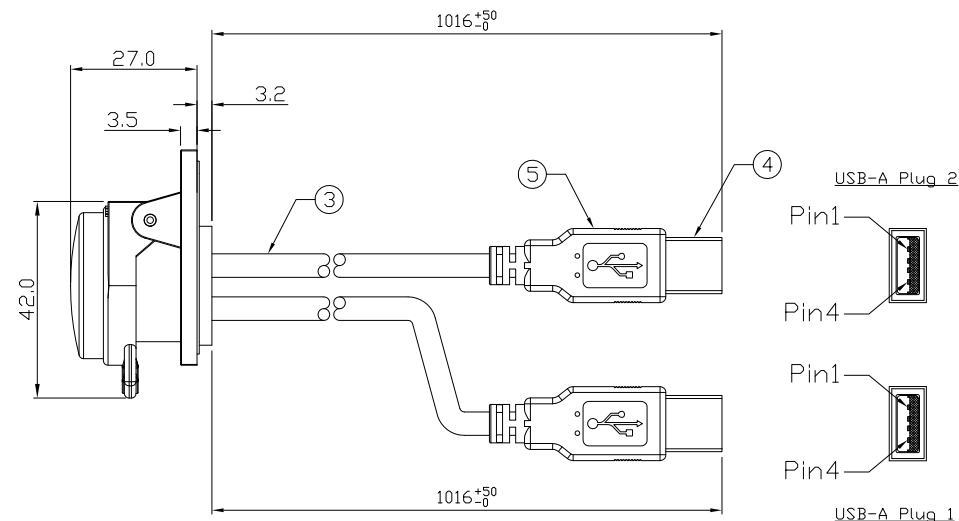

1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Drain	Shell
Conn.2 USB-A Plug 2		
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Drain	Shell
Conn.1 USB-A Plug 1		

Wiring Diagram

GTC
 DOC.CENTER.ISSUE
JUL.03.2018
 ONLY FOR
 RELEASE

5	Over Mold	PVC Color: Black	2
4	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: SPCG, Finish: Ni Plated	2
3	Cable	UL2725 1P*28AWG+2C*20AWG+AL/My+D+B Color: Black, OD=5.0mm	2
2	Screw	Stainless(TP1) Finish:-	4
1	USB-A C4 Panel Square Flange Dual-USB JACK With Cable + Dust Cover	GT Contact P/N: GT111443-04-XX	1
Item	Part Name	Material / Finish	Qty

TITLE USB-A C4 Panel Square Flange Dual-USB JACK With 40inches Cable + Cap + USB-A Plug

DRAWING NUMBER
RR-111443-AMX2-40
 REV. 02

DO NOT SCALE DRAWINGS	B	1:1	Joyce 05/31/17	Lucas 05/31/17	Ray 05/31/17	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

USBFIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING:
 1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
 2. NOT TO REPRODUCE OR COPY IT
 3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019