

1

2

3




4

- Notes: (unless Otherwise Specified)
1. Waterproof Rate: IP67.
 2. Recommend Panel Thickness: 0.8 to 3.0 mm.
 3. Recommend Torque: 6~7 Kgf-cm.
 4. Mating Cap P/N: RR-1C121022.
 5. Temperature Range: -40°C~80°C.
 6. ROHS Compliant.
 7. 產品採用吸塑盒包裝,並於吸塑盒上蓋貼上標籤.



RR-114200-10_REV04_QTY:48PCS



REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 06/06/12	Lucas 06/06/12	Ray 06/06/12

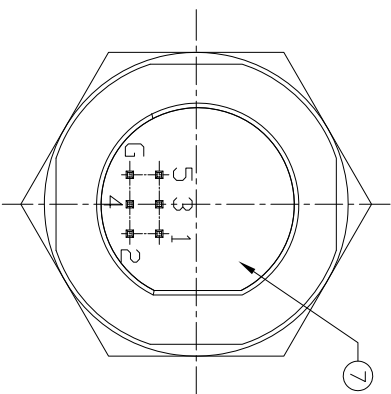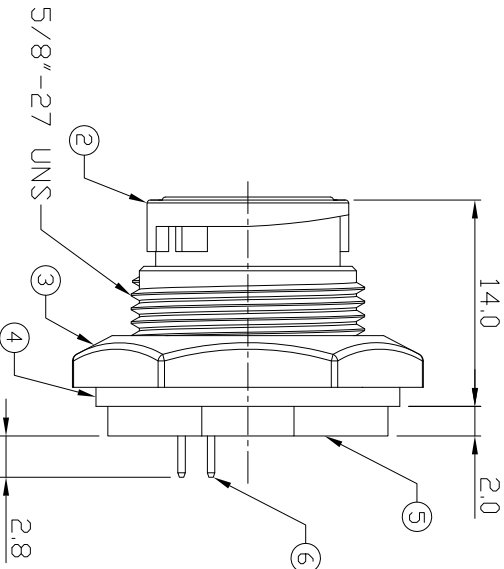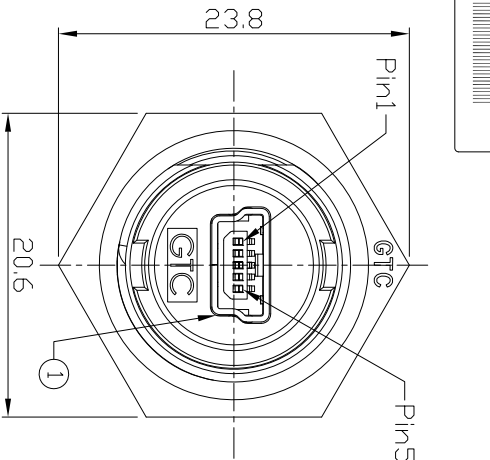

7	Glue	Epoxy Color: Black	
6	Pin Header	Housing: Thermal Plastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated	1
5	PCB	FR-4 Color: Green	1
4	Gasket	Silicone Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Housing	Thermoplastic Color: Black	1
1	Mini USB-B Receptacle	Housing: Thermal Plastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
Item	Part Name	Material / Finish	Qty

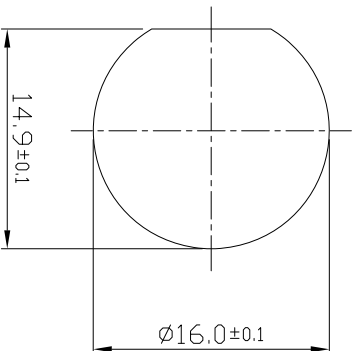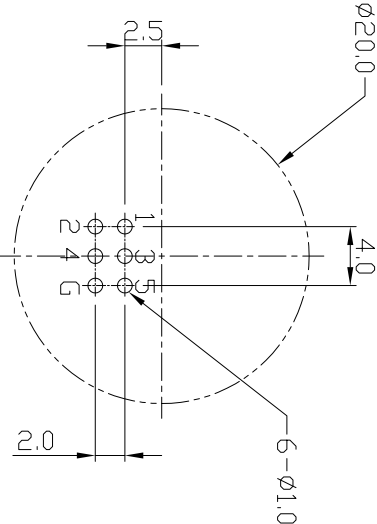

Mini USB-B Plastic C2 Panel Jack Dip Lock

DRAWING NUMBER
RR-114200-10
REV.
A0



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

A

B

C

D

1

2

3

4

DO NOT SCALE DRAWINGS	B	2:1	Joyce 06/06/12	Lucas 06/06/12	Ray 06/06/12	XXX ± 0.5 XXX ± 0.2	XXXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET