

1

2


3

4



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: RR-1C533122.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 06/05/13	Lucas 06/05/13	Ray 06/05/13



Recommend
Panel Cut-Out

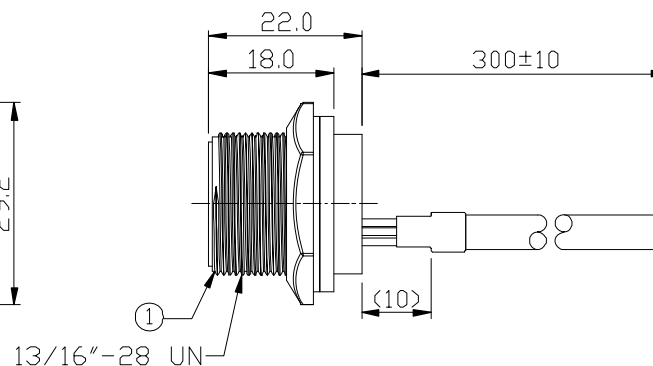

DOC.CENTER.ISSUE
JUN.05.2013
ONLY FOR
RELEASE

1	Red
2	White
3	Green
4	Black
Shell	Drain

Wiring Diagram

2	C3 Screw Cap		0
1	USB-A Panel		1
Item	Part Name	Material / Finish	Qty

TITLE	DRAWING NUMBER	REV.
USB-A Plastic C3 Panel Jack Screw With 0.3M Cable + Cap	RR-116300-03-Z3	A0

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
	B	1:1	Joyce 06/05/13	Lucas 06/05/13	Ray 06/05/13	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1


USB FIREWIRE.com
 THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
 AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
 POSSESSOR AGREES TO THE FOLLOWING
 1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
 2. NOT TO REPRODUCE OR COPY IT
 3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4