

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C5331X2.
5. RoHS & REACH Compliant.
6. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-116310-05-XX_REV:XX_QTY:1PCS

LOT: XXXX

Made in China

7. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.


RR-116310-05-XX_REV:XX_QTY:25PCS

LOT: XXXX


Made in China

8. 標籤上的REV: 請依照成品圖面版本.
9. 不可使用夾鍊袋


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 11/28/13	Lucas 11/28/13	Ray 11/28/13

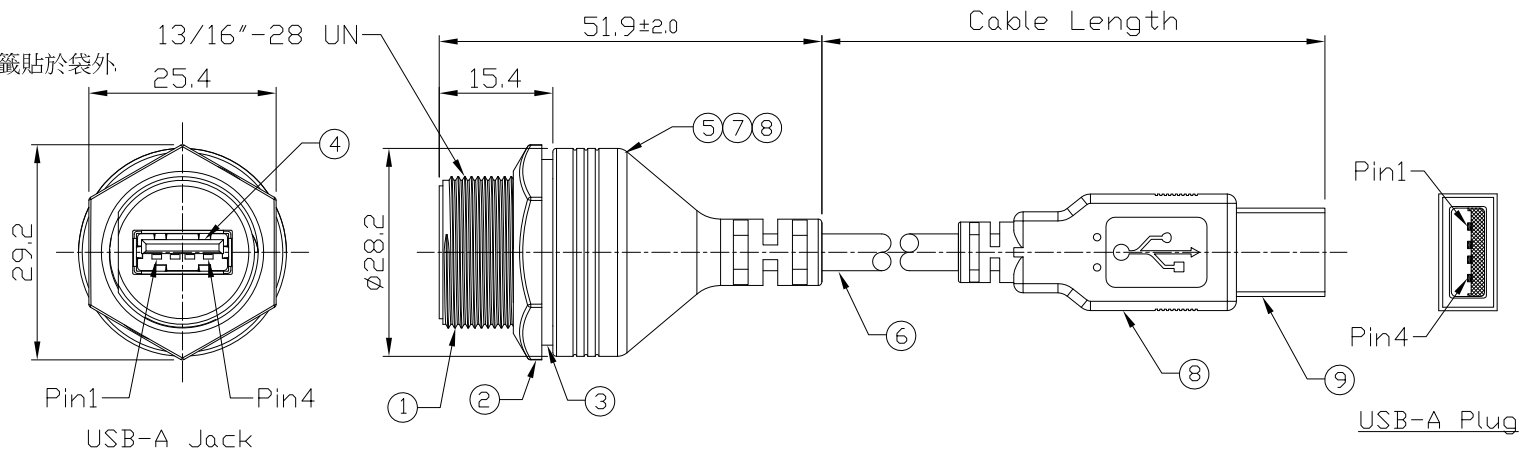

9	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
8	Over Mold	PVC Color: Black	2
7	Inner Mold	Thermoplastic Color: White Or Black	1
6	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B Color: Black, OD=5.0mm	1
5	PCB	FR-4 Color: Green	1
4	USB-A Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



Recommend
Panel Cut-Out

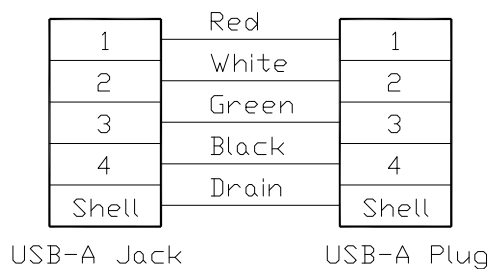

Wiring Diagram

GTC
DOC.CENTER.ISSUE
MAR.28.2023
ONLY FOR
RELEASE

RR-116310-05-78	1981 mm	+100
RR-116310-05-39	990 mm	+50
RR-116310-05-28	711 mm	+50
RR-116310-05-20	500 mm	+50
Part No.	Cable Length	Tol.

TITLE USB-A Plastic C3 Cable To Cable Jack Screw With Cable
+ USB-A Plug

DRAWING NUMBER
RR-116310-05-XX

REV.
A0

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
1	2	3	4	5	6	7	8	9

USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART