



Notes: (Unless Otherwise Specified)  
 1. Waterproof Rate: IP67.  
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 03/05/14	Lucas 03/05/14	Ray 03/05/14

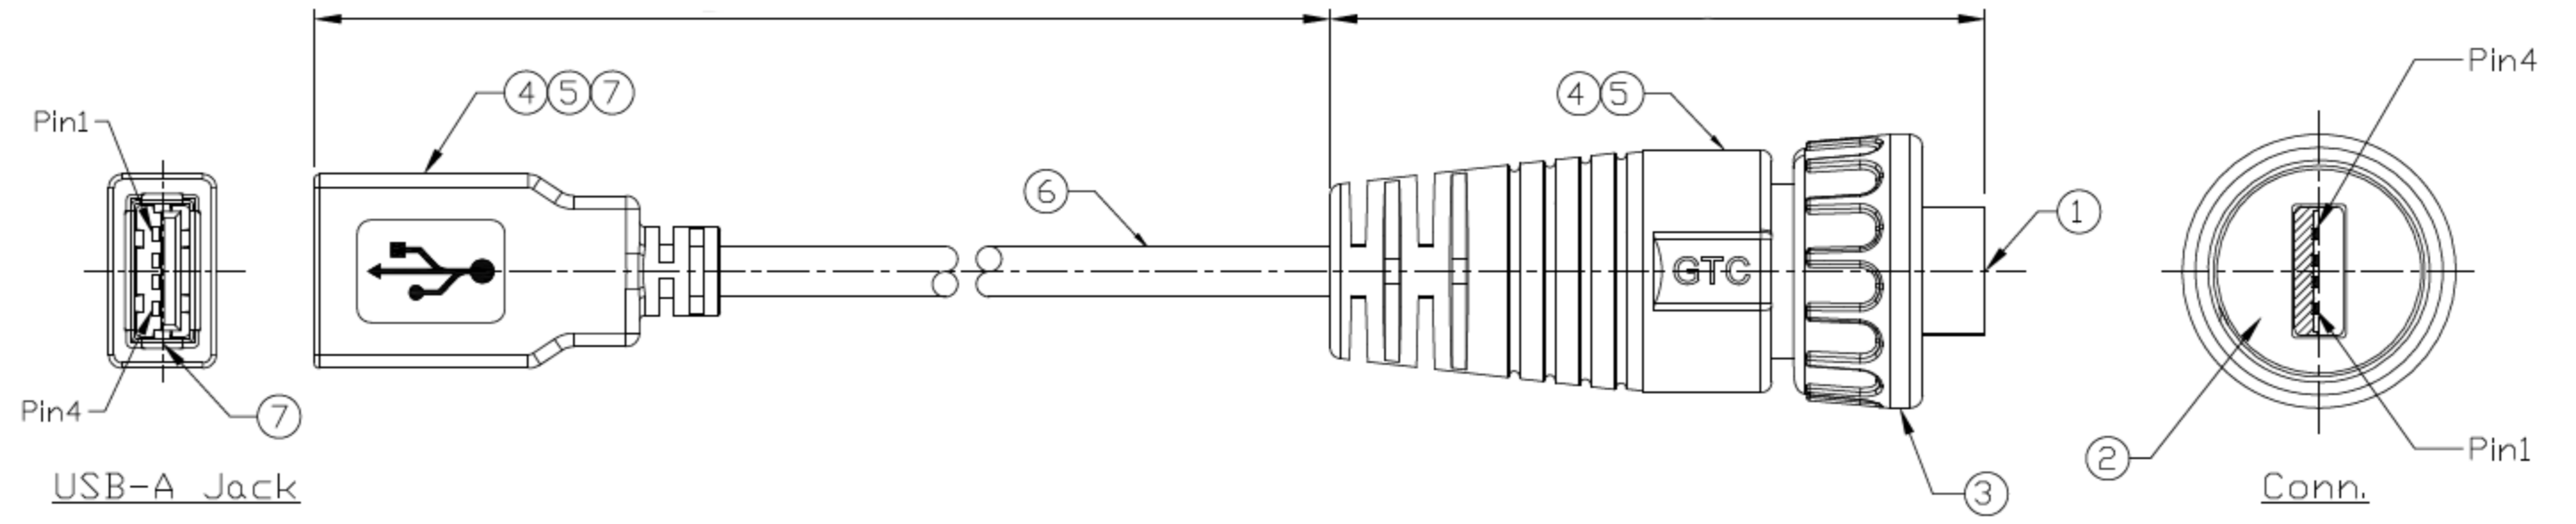

Item	Part Name	Material / Finish	Qty
7	USB-A Receptacle	Housing: Thermoplastic, Color: White Contacts: Copper Alloy, Finish: Gold Flash Shell: Spcc, Finish: Ni Plated	1
6	Cable	UL2725 1P*28AWG+2C*24AWG+Al.My+D+B Color: Black, OD=5.0mm	1
5	Over Mold	PVC Color: Black	2
4	Inner Mold	Thermoplastic Color: White Or Black	2
3	Screw Nut	Thermoplastic Color: Black	1
2	Rubber Pad	Silicone Color: Black	1
1	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1

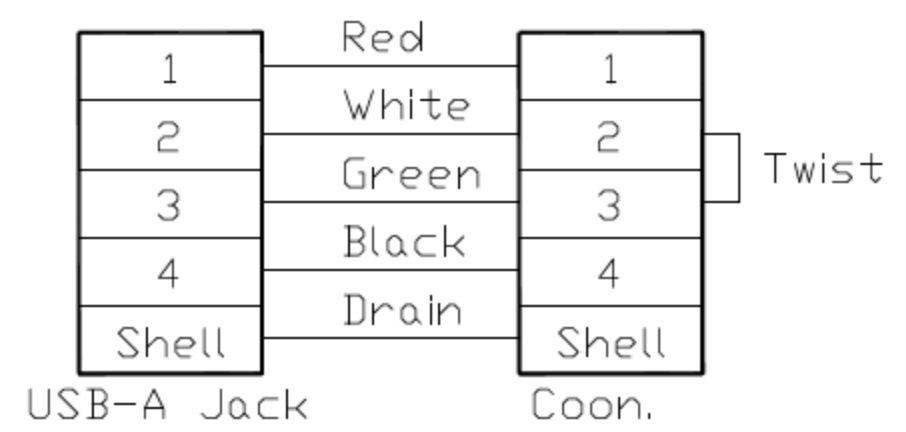

DOC.CENTER.ISSUE  
 MAR.05.2014  
 ONLY FOR  
 RELEASE

www.USBFireWire.com

TITLE USB-A Plastic C3 Cable End Plug Screw With 2M Cable + USB-A Jack					DRAWING NUMBER RR-116320-06-XX			REV. A0	
THIRD ANGLE PROJECTION		SIZE B	SCALE 1:1	DRAW / DATE Joyce 03/05/14	CHECK / DATE Lucas 03/05/14	APPROVE / DATE Ray 03/05/14	TOLERANCES X.X ± 0.5 X.XX ± 0.2	UNIT mm	SHEET 1/1
							ANGLES ± 0.05 ± 1°		

NOTICE OF PROPRIETARY PROPERTY  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (2) NOT TO REPRODUCE OR COPY IT  
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (4) ALL RIGHTS RESERVED