

1

2

3

4

Notes: (Unless Otherwise Specified)




- 1. Waterproof Rate: IP68.
- 2. RoHS Compliant.
- 3. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-125320-02-XXX_REV:XX_QTY:1PCS
LOT: XXXX
Made in China

- 4. 每20PCS產品再用防水袋包裝,並將標籤貼於袋外. (RR-125320-02-360)
每25PCS產品再用防水袋包裝,並將標籤貼於袋外.

RR-125320-02-XXX_REV:XX_QTY:XXPCS
LOT: XXXX
Made in China

- 5. 標籤上的REV: 請依照成品圖面版本.
- 6. 不可使用夾鍊袋

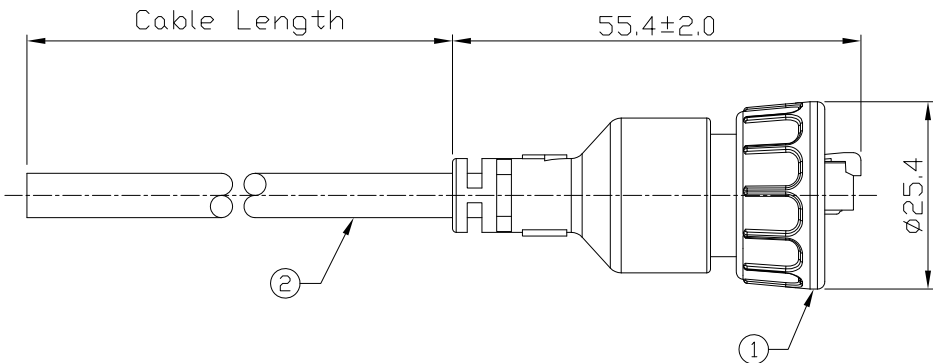

White/Orange	1	Twist
Orange	2	
White/Green	3	Twist
Blue	4	
White/Blue	5	Twist
Green	6	
White/Brown	7	Twist
Brown	8	
Drain	Shell	

Wiring Diagram

2	Cable	CAT5E 24AWG*4P+D+Al/My Color: Black, OD=6.0mm	1
1	RJ45 Plastic C3 Shielded Cable End Plug Screw	GT Contact P/N: GT125320-02-XX	1
Item	Part Name	Material / Finish	Q'TY

TITLE RJ45 Plastic C3 Shielded Cable End Plug Screw With Cable						DRAWING NUMBER RR-125320-02-XXX				REV. A0	
 DO NOT SCALE DRAWINGS	B	1:1	Joyce 02/06/14	Lucas 02/06/14	Ray 02/06/14	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES				UNIT	SHEET

RR-125320-02-360	9144 mm	±450
RR-125320-02-118	3000 mm	±150
Part No.	Cable Length	Tol.



USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4