

Notes: (unless otherwise specified)




1. Waterproof Rate: IP67.
2. Recommend Cover Torque: 6~7 Kgf-cm.
3. Recommend Gland Nut Torque: 9~10 Kgf-cm.
4. Cable Diameter: 5.0mm To 6.0mm.
5. RoHS Compliant.
6. 產品採用無Logo PE袋單PCS包裝 並將標籤貼於袋外

RR-152264-23030_REV/XX_QTY:1PCS
LOT: XXXX
Made in China

7. 每25PCS產品再用無Logo PE袋包裝 並將標籤貼於袋外

RR-152264-23030_REV/XX_QTY:25PCS
LOT: XXXX
Made in China

8. 標籤上的REV: 請依照成品圖面版本.
9. 不可使用夾鍊袋

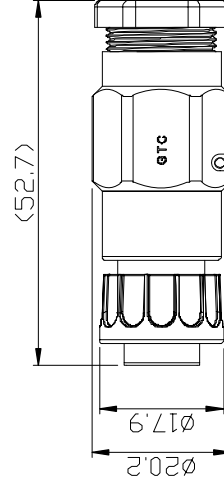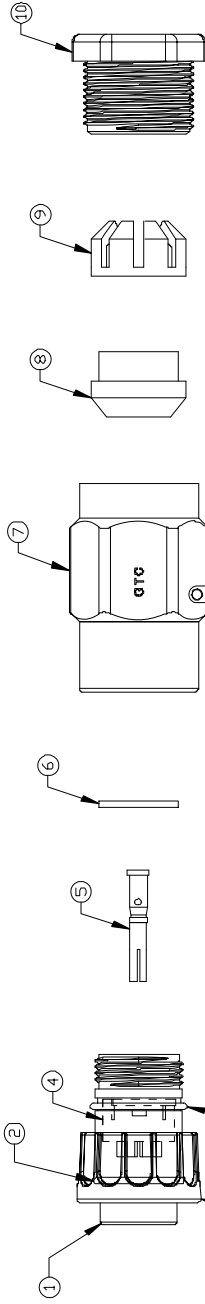

GTC
DOC.CENTER ISSUE
OCT.15.2015
ONLY FOR
RELEASE

10	Gland Nut	Thermoplastic Color: Black	1
9	Gland Cage	Thermoplastic Color: White	1
8	Gland	Silicone Color: Green	1
7	Cover	Thermoplastic Color: Black	1
6	Gasket	Silicone Color: Black	1
5	Contacts	Copper Alloy Finish: Au Plated	3
4	Base	Thermoplastic Color: Black	1
3	Lock Nut	Thermoplastic Color: Black	1
2	O-Ring	Silicone Color: Red	2
1	Housing	Thermoplastic Color: Black	1
Item Part Name		Material / Finish	Qty

TITLE		C2 10A 3P Field Installable Cable End Female Crimp Lock		DRAWING NUMBER	RR-152264-23030	REV.	A0
DO NOT SCALE DRAWINGS	B	1:1	Joyce 10/14/15	XX ± 0.5	XX.XX ± 0.05	1/1	
	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	UNIT	SHEET
THIRD ANGLE PROJECTION						mm	1/1
				TOLERANCES		UNIT	SHEET

www.USBFireWire.com

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF USBFIREWIRE.COM THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED