

1

2

3

4

Notes: (Unless Otherwise Specified)





1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 19~20 Kgf-cm.
4. Mating Cap P/N: GT1C5231X2/GT2C123012.
5. RoHS Compliant.
6. Type C -Pin out is the same as this drawing.
7. UL Certification file #E364108.
8. Use USB 10PCS-Bulk Plastic Box with labels on the Top of Box.

RR-21C300-30_REV:XX_QTY:10PCS

LOT: XXXX

Made in XXXXX

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 01/11/23	Lucas 01/11/23	Ray 01/11/23

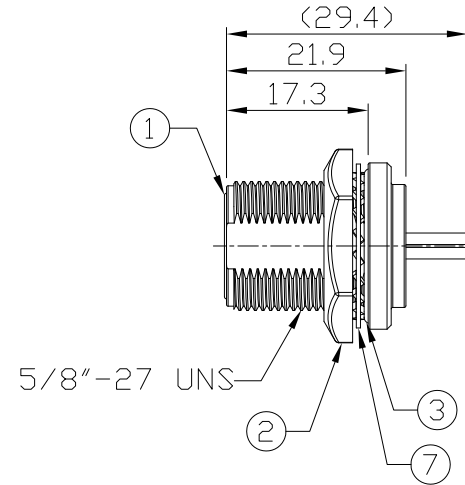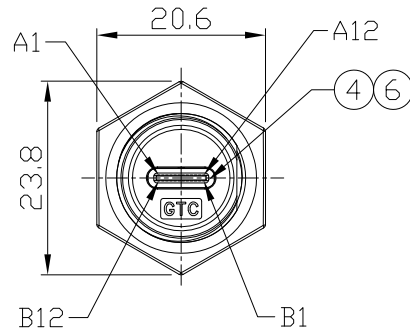

Front View
Recommend
Panel Cut-Out



7	Metal Washer	SUS Finish:-	1
6	EMI Shielded Plate	Copper Alloy Finish: Ni Plated	1
5	Glue	Epoxy Color: Black	
4	USB Type C 3.1	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au 30u" Plated Shell: Stainless Steel, Finish: Au Plated	2
3	O-Ring	Silicone Color: Red	1
2	Hex Nut	Zn Alloy Finish: Ni Plated	1
1	Housing	Zn Alloy Finish: Ni Plated	1
Item	Part Name	Material / Finish	Q'ty

TITLE USB 3.1 Type C Metal C2 Panel Jack Screw Coupler						DRAWING NUMBER RR-21C300-30		REV. A0
THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	DRAW / DATE Jenny 01/11/23	CHECK / DATE Lucas 01/11/23	APPROVE / DATE Ray 01/11/23	TOLERANCES X.X ± 0.5 X.XX ± 0.2	UNIT mm	SHEET 1/1


USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART