

1

2

3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Cable Diameter: 6.0 To 8.5 mm.
- 3. Recommend Cover Torque: 6.0 To 7.0 Kgf-cm.
- 4. Recommend Gland Nut Torque: 9.0 To 10.0 Kgf-cm.
- 5. Matting No.: GT225200/GT225500 Series.
- 6. RoHS Compliant.
- 7. Pack Each Product In A Poly Bag And 25pcs In A Poly Bag.


RR-225370-A0_REV:XX_QTY:1PCS
LOT: XXXX
Made in XXXXX

RR-225370-A0_REV:XX_QTY:25PCS
LOT: XXXX
Made in XXXXX

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Aileen 07/15/24	Hank 07/15/24	Lucas 07/15/24

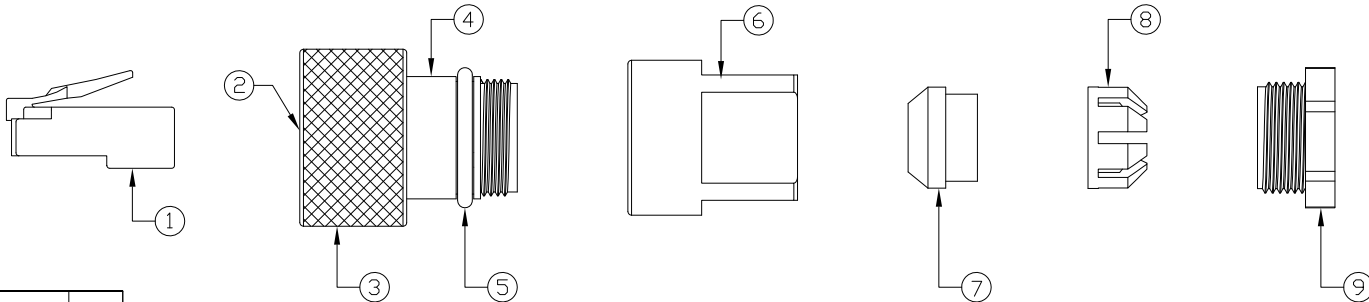

9	Metal Gland Nut	Copper Alloy Finish: Ni Plated	1
8	Cage	Thermoplastic Color: White	1
7	Gland	Silicone Color: Red	1
6	Metal Cover	Copper Alloy Finish: Ni Plated	1
5	D-Ring	Silicone Color: Red	1
4	Housing	Thermoplastic Color: Black	1
3	Metal Screw Nut	Copper Alloy Finish: Ni Plated	1
2	Rubber Pad	Silicone Color: Black	1
1	RJ45 Plug	Housing: Thermoplastic, Color: Clean Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
Item	Part Name	Material / Finish	Q'ty

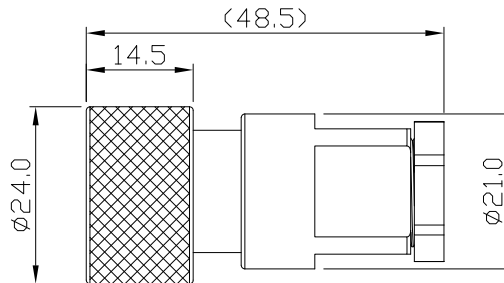

GTC
DOC.CENTER.ISSUE
JUL.15.2024
ONLY FOR
RELEASE

TITLE RJ45 Full Metal C3 Shielded Field Installable Cable End Screw						DRAWING NUMBER RR-225370-A0				REV. A0	
 DO NOT SCALE DRAWINGS	B	1:1	Aileen 07/15/24	Hank 07/15/24	Lucas 07/15/24	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES				UNIT	SHEET



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART