

1

2

3

4

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.
3. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-271134-21055-XX_REV:XX_QTY:1PCS

LOT: XXXX
Made in China


4. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.

RR-271134-21055-XX_REV:XX_QTY:25PCS

LOT: XXXX
Made in China

5. 標籤上的REV: 請依照成品圖面版本.
6. 不可使用夾鍊袋

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Whitney 01/14/19	Lucas 01/14/19	Ray 01/14/19

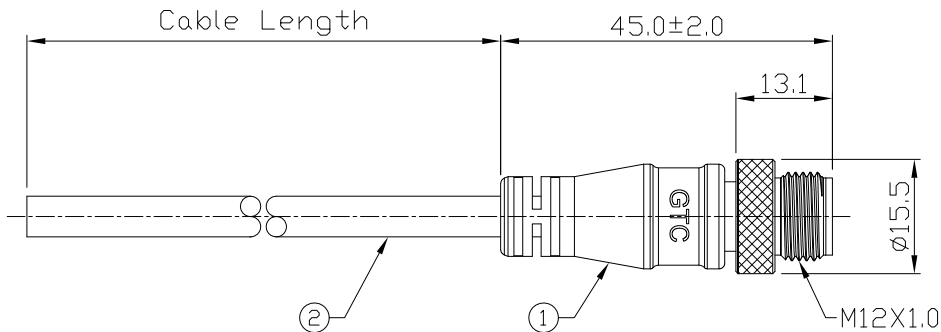

Shield Braid	
Red (18 AWG)	1
Black (18 AWG)	2
White (22 AWG)	3
Blue (22 AWG)	4
	5

Conn.1

Wiring Diagram

2	Cable	UL2725 1P*18AWG+1P*22AWG+Al/My+D+B Color: Black, OD=6.0mm	1
1	M12 4A 5P Male	GTC Contact P/N: GT271134-21055-XX	1
Item	Part Name	Material / Finish	Q'ty

TITLE						DRAWING NUMBER			REV.	
Micro 4A 5P Cable End Male With UL2725 Cable						RR-271134-21055-XX			A0	
	B	1:1	Whitney 01/14/19	Lucas 01/14/19	Ray 01/14/19	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm 1/1
THIRD ANGLE PROJECTION			SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET

RR-271134-21055-10	10000 mm	+500
RR-271134-21055-05	5000 mm	+150
RR-271134-21055-03	3000 mm	+100
RR-271134-21055-01	1000 mm	+50
Part No.	Cable Length	Tol.



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART