


RoHS COMPLIANT

P1端用50P料 P2端指定用30P料

DESCRIPTION CONTROL

REV	DESC	DATE	APP
B		09.11.24	N20911281
C		10.06.07	自然切換
D		11.09.28	N21109139

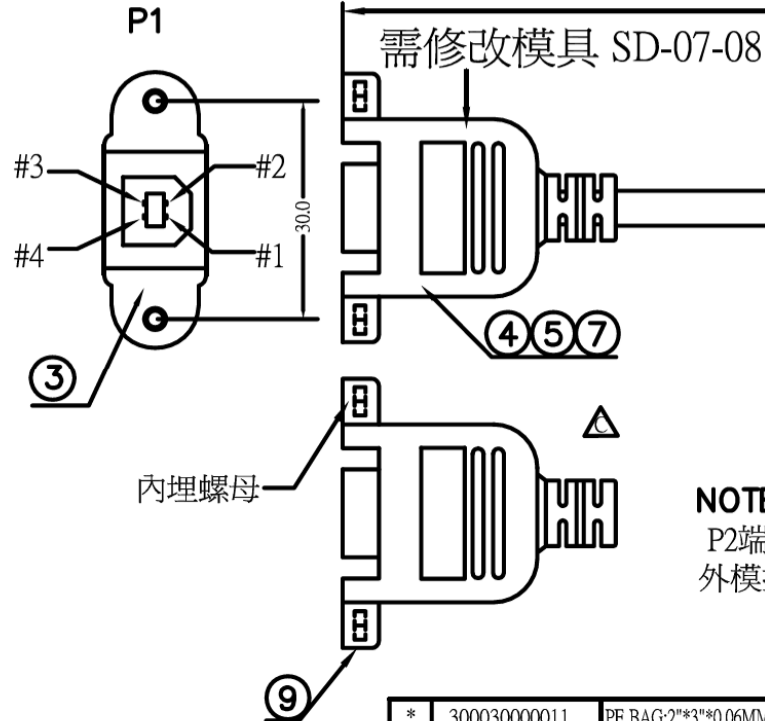


<注意P2端插頭成型後不能有搖動或晃動現象，需特別檢驗留意;>
<P2端內模指定用PVC料,外模指定用PVC 30P 料>

NOTE:
 MINI USB 5P內外模都要用PVC料
成型,插頭外露仍然要保持7mm

CUSTOMER P/N	L±T	M	
RR-2MBR02BFPM-10GL	254±10	0.255	LABEL:45*15MM
RR-2MBR02BFPM-12GL	305±15	0.306	LABEL:45*15MM"RR-2MBR02BFPM-10GL"
			LABEL:45*15MM"RR-2MBR02BFPM-12GL"

NOTE:
P2端內模料指定用PVC料成型;
外模指定用30P料成型;

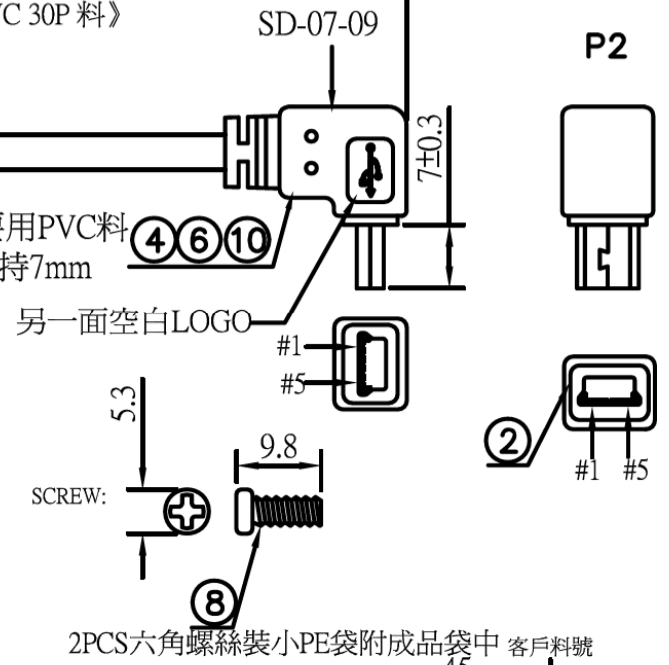

* 300030000011	PE BAG:2"3"0.06MM	1	PCS
*	LABEL:45*15MM<白底黑字>		1 PCS
* 310000000012	CARTON:46*30*25CM	A/R	PCS
* 300010000001	PE BAG:30"28"0.08MM	A/R	PCS
* 300030000193	PE BAG:5"6"0.06MM	1	PCS
10 120010000116	PVC-BK10/30		6.2 G
9 240020000008	NUTS:4.75*2.0MM<4#-40>	2	PCS
8 240010700138	SRW:5.4*9.8MM <全牙>	2	PCS
7 120020000001	PE-5321	4.5	G
6 210030000057	HI TEAMP TAPE:W:6MM;	20*2	MM
5 120010000031	PVC-BK10/50		6.8 G
4 230020000001	SOL-WIRE-FULL-TIN-1.0	0.2	G
3 110082304081	USB-B-S<WH>(鐵殼鍍金)	1	SET
2 110081004126	MINI-USB-B-P-5PIN(BK) <一件式> (鐵殼鍍金)	1	SET
1 130304110000X	UL2725 28#*1P+24#*2C+AB,BK10, -OD:4.8<REV2.0>	L	M
NO	PART NO.	DESCRIPTION	QTY UNIT

NOTE:
1.REF:UB02023-1112
2.單PCS包裝,PE袋貼印客戶料號貼紙.

INNER MOLDING	USB.B063KF	USB.A065KF
OUTER MOLDING	USB.B064KF	USB.A066KF

PIN ASSIGNMENT			
P1			P2
1	RED	1	
2	WHITE	2	
3	GREEN	3	
4	BLACK	5	
S	BRAID	S	



THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2019

	ITEM: RR-2MBR02BFPM-XXGL	REV: D
DRAW,BY: 劉權	SCALE: NONE	DATE: 2009-10-08
CHECK,BY:	CUSTOMER: C331<陸鴻>	
APP,BY:	CUSTOMER P/N:	
ALL DIMENSIONS IN mm		