



FILE NO: IE-02188

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
B	B	08-10-30	N20810200

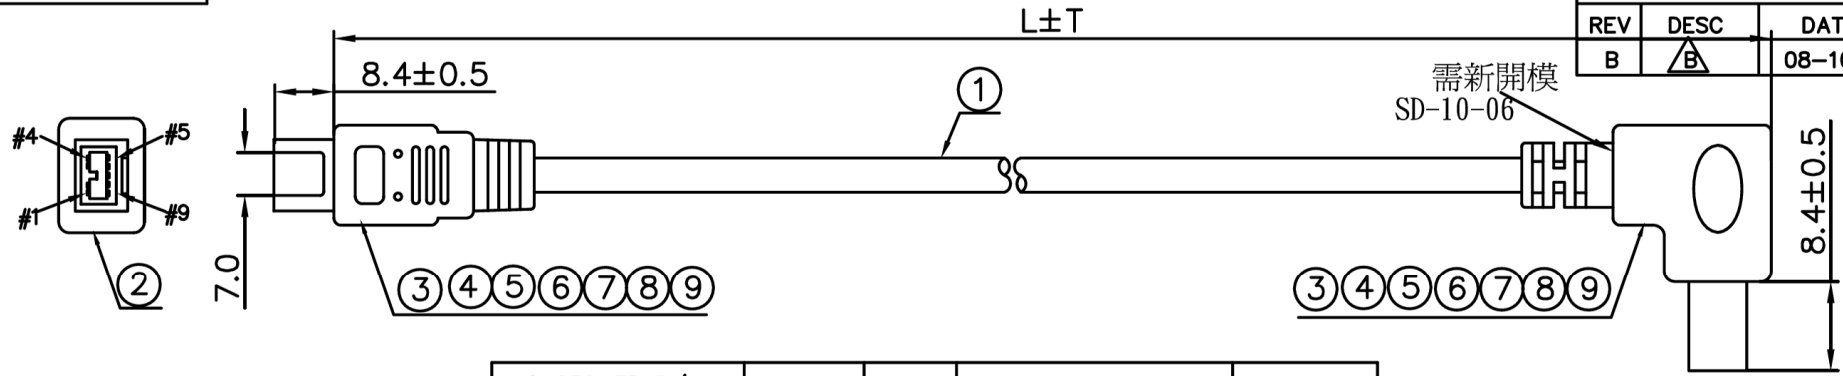

CUSTOMER P/N	L±T	M	PE BAG: L*W*0.06MM	TIE-A/BK10
RR-9D9S-06G	150±20	0.165	PE BAG: 5*6*0.06MM	
RR-9D9S-12G	305±20	0.315	PE BAG: 5*6*0.06MM	80*1
RR-9D9S-24G	610±20	0.62	PE BAG: 5*6*0.06MM	100*1
RR-9D9S-48G	1220±30	1.23	PE BAG: 5*6*0.06MM	100*1
RR-9D9S-72G	1830±50	1.84	PE BAG: 6*8*0.06MM	120*1
RR-9D9S-180G	4572±50	4.58	PE BAG: 7*10*0.06MM	PE膜包

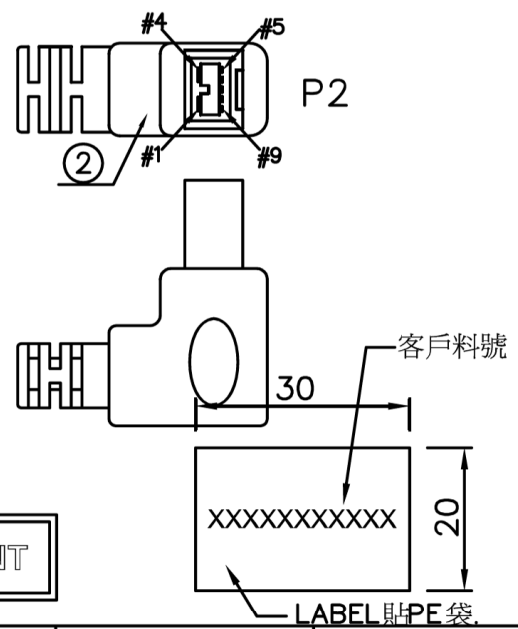


*	390	LABEL: 30*20MM*XXXXXXXX	1	PCS
*	310000000012	CARTON: 46*30*25CM	A/R	PCS
*	30001000000	PE BAG: 30*28*0.08MM	A/R	PCS
*	390	PE BAG: L*W*0.06MM	1	PCS
*	390	TIE-A/BK10	***	MM
9	200032000158	TUBE-HT-φ3.0MM	8*4	MM
8	120010000031	PVC-BK10/50	13.0	G
7	210030000105	HI TEAMP TAPE: W: 8MM;	40*4	MM
6	210030000057	HI-TEAMP-TAPE W: 6MM	35*2	MM
5	200032000155	TUBE-HT-φ1.0MM	20*4	MM
4	210010000088	FOIL-CU-6MM	35*2	MM
3	230020000001	SOL-WIRE-FULL-TIN-1.0	0.3	G
2		IEEE1394b-9P<BK><MOLDING TYPE> <鐵殼鍍金> <BETA><才聖>	2	SET
1	1308061100001	26#*2C+(30#*1P+D+A+MY)*2C+MYLAR +A+B-BK10-5.2U20276<聯穎或同級品>	L	M
NO	PART NO.	DESCRIPTION	QTY	UNIT

NOTE:  
有打樣

RoHS COMPLIANT

www.USBFireWire.com

PIN ASSIGNMENT

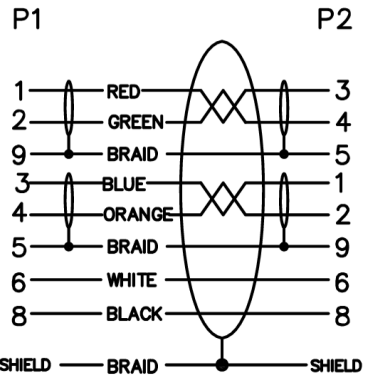

	ITEM: RR-9D9S-XXG	REV B	
	DRAW, BY: 葉麗珍	SCALE: NONE	DATE: 2008/09/24
	CHECK, BY:	CUSTOMER: C331<陸鴻>	
	APP, BY:	CUSTOMER P/N: RR-9D9S-XXG	
ALL DIMENSIONS IN mm			