


CHANGE VERSION	REMARKS	M	14/10/24	CHANGE PACKAGE	F	10/05/28	ADD P/N	I	12/10/26	REMOVE STICKER, CHANGE CABLE	
A	08/07/01	REL	N	16/03/28	ADD P/N	G	10/06/01	ADD P/N	J	13/05/16	ADD P/N
L	14/04/22	ADD P/N	E	09/11/11	CFM 72G TOLERANCE	H	11/10/07	CHANGE CABLE	K	13/07/25	ADD P/N

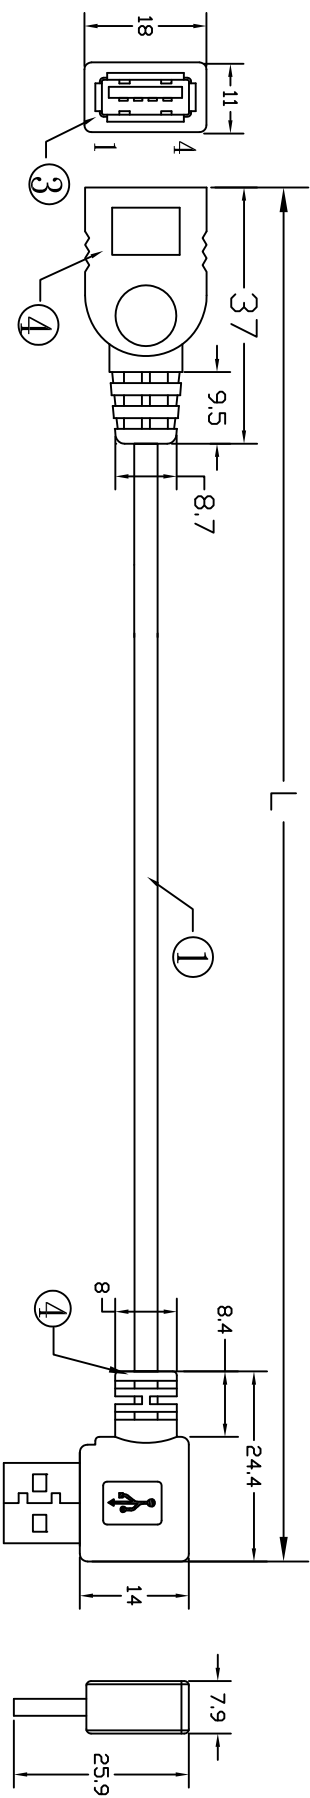

PIN OUT :

- USB AF USB AM
- 1 ————— 1 RD
- 2 ————— 2 WH
- 3 ————— 3 GN
- 4 ————— 4 BK
- S ————— S BRAID

P/N	LENGTH	CABLE L	PACK	PE BAG
RR-AAR04T-04G	102±10	90	(2)	06*3"*8"
RR-AAR04T-05G	127±10	115	(2)	06*3"*8"
RR-AAR04T-06G	153±10	140	(2)	06*3"*8"
RR-AAR04T-8.5G	216±15	205	(3)	06*3"*8"
RR-AAR04T-12G	305±15	293	(3)	06*3"*8"
RR-AAR04T-14G	356±15	345	(3)	06*3"*8"
RR-AAR04T-15.5G	394±15	385	(3)	06*3"*8"
RR-AAR04T-18G	457±15	445	(1)	06*4"*6"
RR-AAR04T-24G	610±20	600	(1)	06*4"*6"
RR-AAR04T-28G	711±20	700	(1)	06*4"*6"
RR-AAR04T-48G	1220±30	1210	(1)	06*5"*7"
RR-AAR04T-72G	1830±30	1820	(1)	06*6"*8"

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL2725 28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(TC)+B(16*4/0.10 TC) OD:5.0±0.15 BLACK (B792) 2.0 (COPARTNER)	1
2	PLUG	USB" A" TYPE MALE GOLD PLATED SHORT TYPE	1
3	PLUG	USB" A" TYPE FEMALE GOLD PLATED W/TINPLATE	1
4	PVC	45P BLACK (B792)PVC	12g
5	PACKAGE	IPCE/PE BAG: 06*A"*B" + P/N STICKER	1

MOLD TOOL NO.

USB AF
A110-558-001
USB AM
A10-557-001

FILE NAME
OM0807003-1

DATE
16/03/28

CUSTOMER

CUSTOMER P/N

SCALE

UNIT
MM

REV
N

CHECKED BY
Marcos

CONFIRMED BY

APPROVED BY

USB
FIREWIRE
.com

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART.
COPYRIGHT © 2019

ROHS

DRAWN BY

