


REV	DESC	DATE	APP

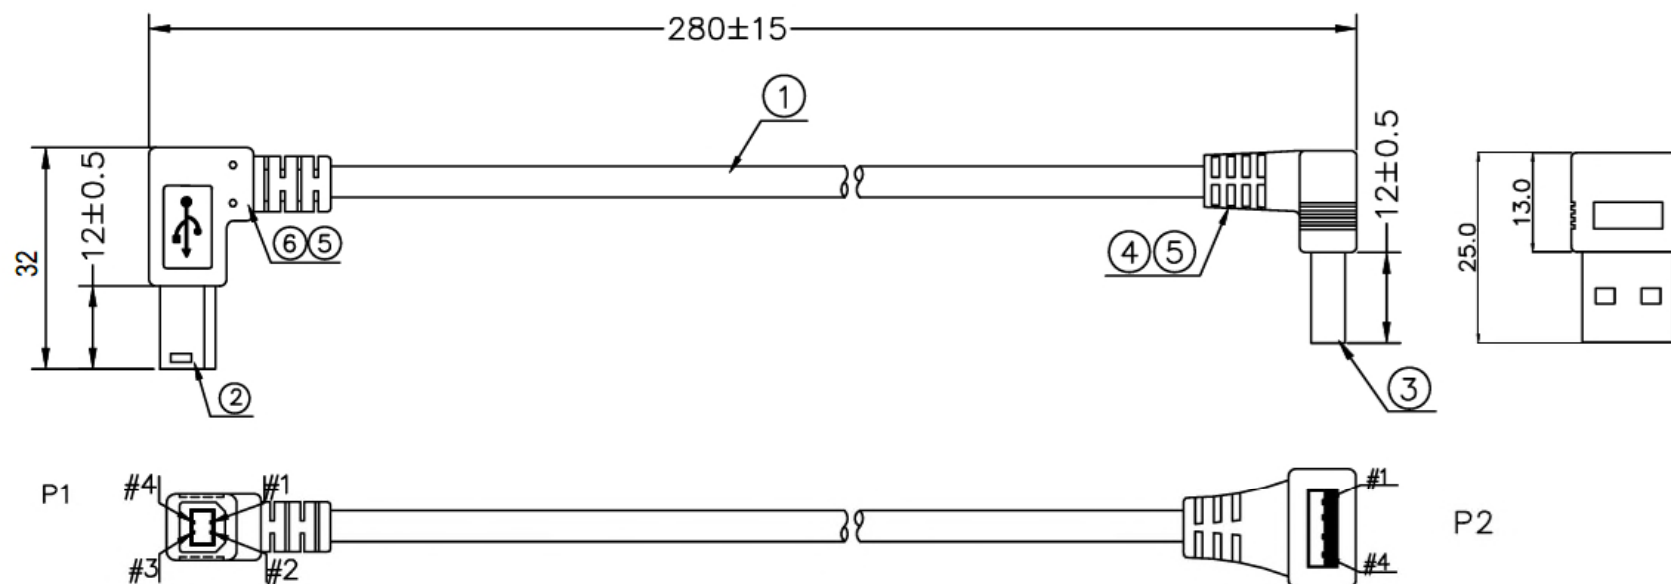

NOTE:

1. 成型時請注意插頭方向

RoHS COMPLIANT

*	390	CARTON: 46*30*25CM	A/R	PCS	INNER MOLDING	USB.A328KF	USB.B-088		
*	390	PE BAG: 30*28*0.08MM	A/R	PCS	OUTER MOLDING	USB.A329KF	USB.B-089		
*	390	PE BAG: 5*6*0.06MM	1	PCS	 USBFIREWIRE.com THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2019	ITEM: RR-AR02TBR05-XXG REV R			
6	370	PE-5321	3	G					
5	220	PVC-BK10/50	13.3	G					
4	220	SOL-WIRE-FULL-TIN-1.0	1	G					
3	220	USB-A-P<BK>(一件式)<鍍般鍍金>	1	PCS		SCALE: NONE		DATE: 2008-05-9	
2	220	USB-B-P<BK>(一件式)<鍍般鍍金>	1	PCS		DRAW,BY: 苗云麗			
1	130304110000X	28*1P+24*2C+A+B-BK10-4.8U2725(REV: 2.0)(慶龍或同級品)	0.3	M	CHECK,BY:	CUSTOMER: C331(陸鴻)		PAGE: 1/1	
					APP,BY:	CUSTOMER P/N: RR-AR02TBR05-11			
NO	PART NO	DESCRIPTION	QTY	UNIT	ALL DIMENSIONS IN mm				

PIN ASSIGNMENT

P1			P2
1	RED	1	
2	WHITE	2	
3	GREEN	3	
4	BLACK	4	
S	BRAID	S	