


CHANGE VERSION	REMARKS	C		
A	08/10/06	REL	D	
B	09/03/30	ADD P/N	E	

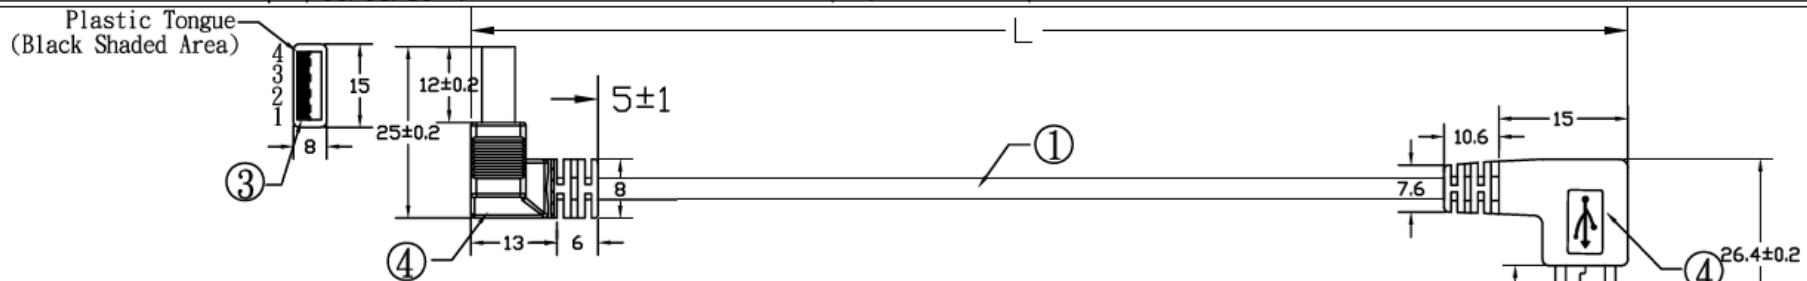


P/N	LENGTH	PACK
RR-AR2TBL1-06G	153±10	(1)
RR-AR2TBL1-12G	305±15	(2)
RR-AR2TBL1-24G	610±20	(3)
RR-AR2TBL1-36G	915±30	(3)

PIN OUT :

USB AM	USB BM
1	1 RD
2	2 WH
3	3 GN
4	4 BK
S	S BRAID


45mm	45mm
RR-AR2TBL1-06G	RR-AR2TBL1-24G
45mm	45mm
RR-AR2TBL1-12G	RR-AR2TBL1-36G

P/N STICKER

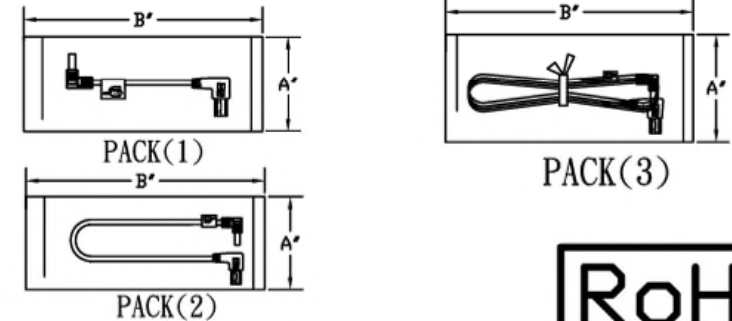

MATERIAL LIST :

RoHS

NO. P/NAME		DESCRIPTION	Q' TY	MOLD TOOL NO	 USB FIREWIRE.com THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2019				DRAWN BY	
1	WIRE	UL2725 28AWG*1P+24AWG*2C+AL+1+64B(AM) OD:5.0±0.15 BLACK(B792) 2.0 VERSION	1	AM A110-459-001 "B" TYPE A110-393-001		SCALE	UNIT	REV	MARCOS	
2	PLUG	USB" B" TYPE MALE GOLD PLATED SHORT TYPE	1						CHECKED BY	
3	PLUG	USB" A" TYPE MALE GOLD PLATED SHORT TYPE	1						CONFIRMED BY	
4	PVC	45P BLACK(B792)PVC	12g				MM	B		
5	STICKER	AS ABOVE (24*40mm)	1				FILE NAME	CUSTOMER		CHECKED BY
6	PACKAGE	1PCE/PE BAG:06*3"*8" +P/N STICKER	1				OW0810006			
							DATE	CUSTOMER P/N		APPROVED BY
					09/03/30	RR-AR2TBL1-XXG				