


1

2

3

4


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-210221	Cable Length Change To Tip to Tip	Lucas 02/26/21	Lucas 02/26/21	Ray 02/26/21

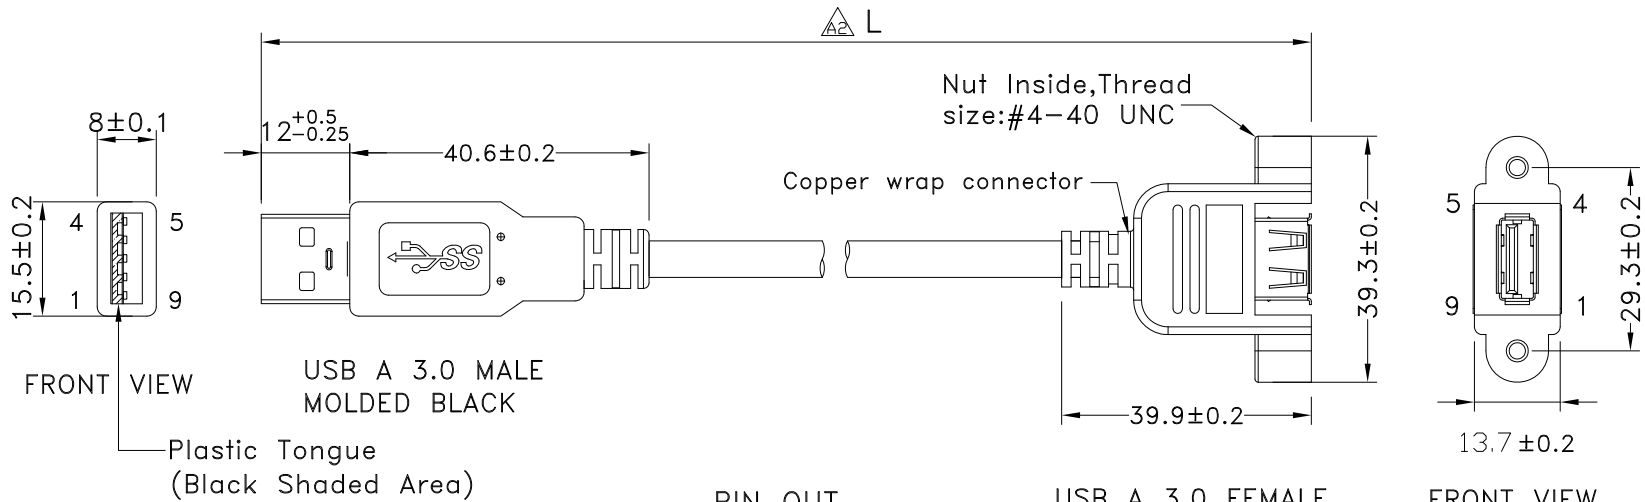

PIN OUT		
USB A M		USB A F
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN	7
8	PURPLE	8
9	ORANGE	9
	BRAID	
SHEEL		SHEEL

P/N	LENGTH
RR-ASAFPM-08GR	203 ⁺²⁰ ₋₀
RR-ASAFPM-10GR	255 ⁺²⁰ ₋₀
RR-ASAFPM-20GR	508 ⁺³⁰ ₋₀
RR-ASAFPM-40GR	1016 ⁺⁴⁰ ₋₀

TITLE						DRAWING NUMBER			REV.
USB3.0 A MALE TO FEMALE						RR-ASAFPM-XXGR			A2
	B	1:1	Lucas 09/11/14	Ray 09/11/14	Ray 09/11/14	X.X ± 0.5	X.XXX ± 0.2	X.XXX ± 0.05	mm
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			SHEET



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-210221	Cable Length Change To Tip to Tip	Lucas 02/26/21	Lucas 02/26/21	Ray 02/26/21

***CONSTRUCTION:

1.CABLE: * UL2725[(1PR/28#+EAM)*2]+(1PR/28#+A)+2C/24#]+AB85%
OD:5.5mm BLACK JACKET (REV:3.0)

***CONNECTOR:

2.USB A/M: * USB A "3.0" TYPE 9PIN MALE SOLDER TYPE.
* PINS: 30u GOLD PLATED OVER NICKEL.
* SHELL: BRASS WITH GOLD FLASH .
* INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
* MOLDED BLACK PVC 45P.

3.USB A/F: * USB A "3.0" TYPE 9PIN FEMALE SOLDER TYPE.
* PINS: 30u GOLD PLATED OVER NICKEL.
* SHELL: BRASS WITH GOLD FLASH .
* INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
* SCREW: 5.0*11mm, NUT: #4-40UNC L=3mm W=6.3mm.
* MOLDED BLACK PVC 45P.

4.TEST: * CT: 2 ohm IS: 5M ohm.

5.PACKING: * PACK EACH CABLE IN A POLY BAG AND 25PCS IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.



TITLE USB3.0 A MALE TO FEMALE					DRAWING NUMBER RR-ASAFPM-XXGR			REV. A2	
 DO NOT SCALE DRAWINGS	B	1:1	Lucas 09/11/14	Ray 09/11/14	Ray 09/11/14	X.X ± 0.5 X.XX ± 0.2	XXX ± 0.05 ANGLES ± 1°	mm	2/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

1

2

3

4


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-210221	Cable Length Change To Tip to Tip	Lucas 02/26/21	Lucas 02/26/21	Ray 02/26/21

P/N	LENGTH(mm)	PE BAG(inch)	PACKAGE
RR-ASAFPM-08GR	203 ⁺²⁰ ₋₀	5.5*10	(1)
RR-ASAFPM-10GR	255 ⁺²⁰ ₋₀	5.5*10	(2)
RR-ASAFPM-20GR	508 ⁺³⁰ ₋₀	5.5*10	(2)
RR-ASAFPM-40GR	1016 ⁺⁴⁰ ₋₀	5.5*10	(2)

PE BAG LABEL


RR-ASAFPM-XXGR REV:XX LOT: XXXX Made in China
RR-ASAFPM-XXGR REV:XX QTY:25PCS LOT: XXXX Made in China

RoHS LABEL


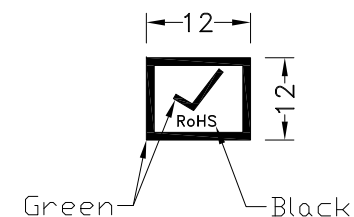


NOTES:PACK EACH CABLE IN A POLY BAG
AND 25PCS IN A POLY BAG.

PACK(1)



PACK(2)

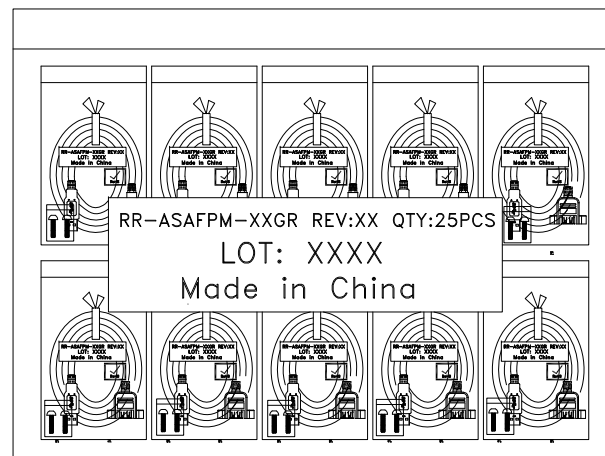

GTC
DOC.CENTER.ISSUE
FEB.26.2021
ONLY FOR
RELEASE

TITLE						DRAWING NUMBER			REV.
USB3.0 A MALE TO FEMALE						RR-ASAFPM-XXGR			A2
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES ± 1°	mm 3/3
						TOLERANCES			SHEET



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART