

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.
3. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-21C320-04-XX_REV:XX_QTY:1PCS
LOT: XXXX
Made in China




4. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.

RR-21C320-04-XX_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

5. 標籤上的REV: 請依照成品圖面版本.
6. 不可使用夾鍊袋
7. Type C AB面接點需跟圖面一致.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 12/19/19	Lucas 12/19/19	Ray 12/19/19

GTC
 DOC.CENTER.ISSUE
DEC.19.2019
 ONLY FOR
 RELEASE

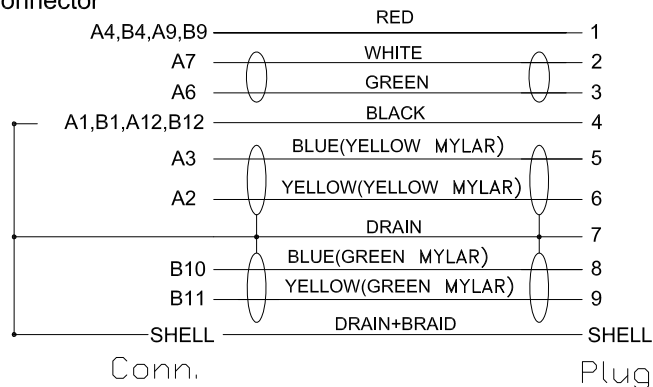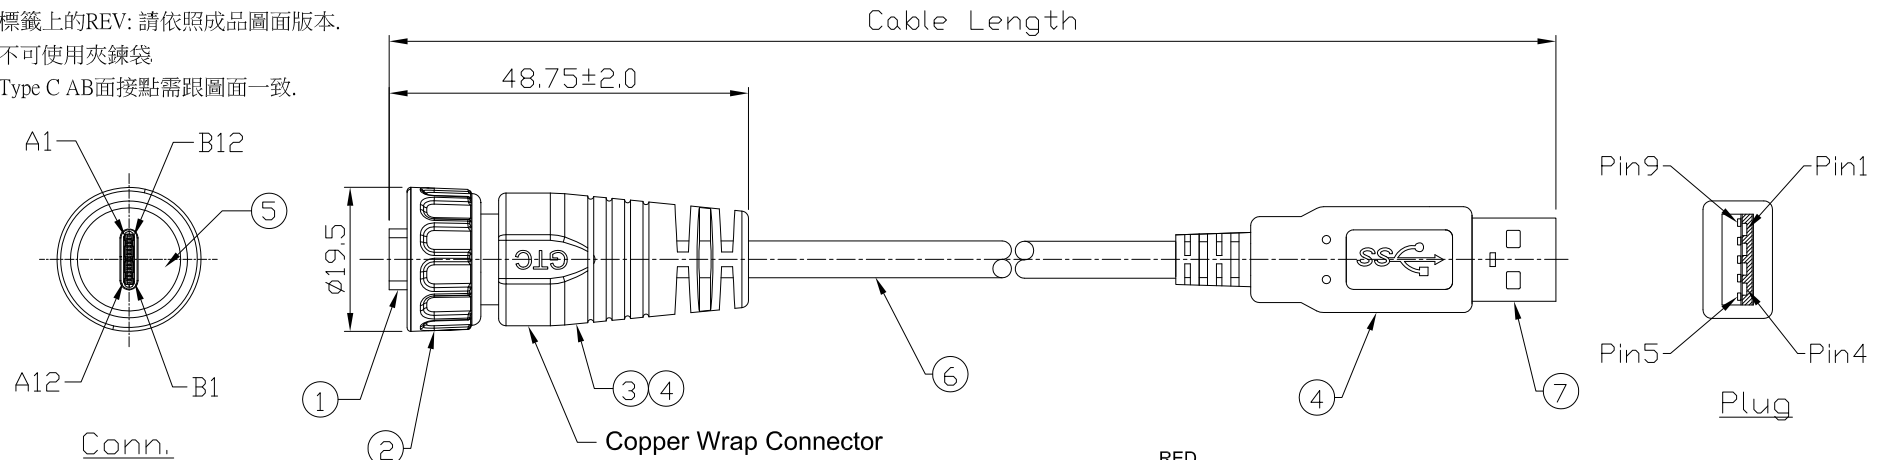

7	USB-A 3.0 Plug	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
6	Cable	UL2725 (1P/30#+EAM)*2+(1P/30#)+(2C/24#)+AEB(AL)65% OD:5.0mm, BLACK PVC JACKET.	1
5	Rubber Pad	Silicone Color: Black	1
4	Over Mold	PVC Color: Black	2
3	Inner Mold	Theroplastic Color: Black	1
2	Screw Nut	Zn Alloy Finish: Ni Plated	1
1	USB Type C 3.1	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Stainless Steel, Finish: Au Plated	1
Item	Part Name	Material / Finish	Q'ty

RR-21C320-04-XX	MM	+50
PART NUMBER	UNIT	TOL

TITLE						DRAWING NUMBER			REV.	
USB 3.1 Type C Metal C2 Cable End Plug Screw With USB-A 3.0 Plug						RR-21C320-04-XX			01	
	B	1:1	Lucas 12/19/19	Lucas 12/19/19	Ray 12/19/19	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019