


FILE NO: UB-01096

NOTE:

MINI USB 5P內外模都要用PVC料
成型,插頭外露仍然要保持7mm

DESCRIPTION CONTROL

REV	DESC	DATE	ECN NO

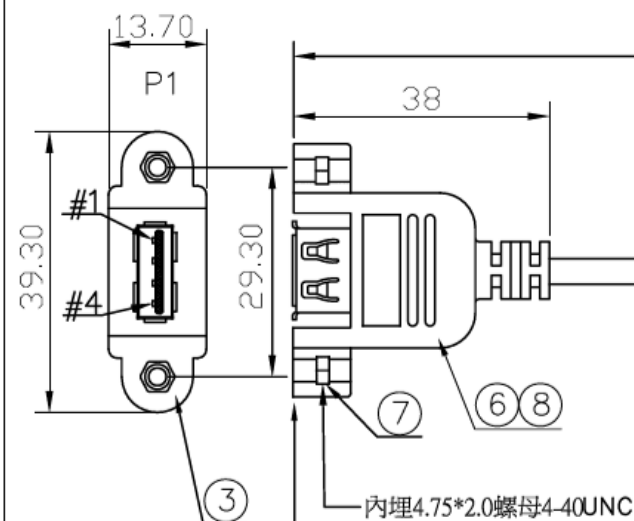


A母頭需與外模平齊



<注意P2端插頭成型後不能有搖動或晃動現象,需特別檢驗留意;>
 <P2端內模指定用PVC料,外模指定用PVC 30P料>

NOTE:

P2端內模料指定用PVC料成型;
 外模指定用30P料成型;

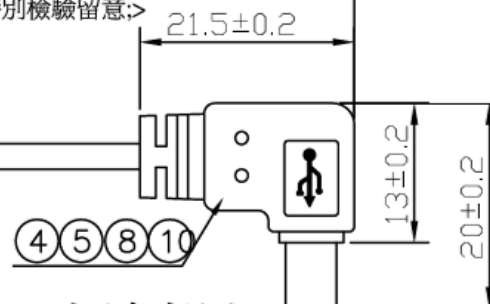

大邊朝上



2PCS 螺絲用PE袋裝.

CUSTOMER P/N	L±T	M	PE BAG: L"W*0.06MM	TIE-A/BK10	Q'TY
RR-2MBR1AFPM-06GLX	152±15	0.167	PE BAG: 5"6"0.06MM		A/R
RR-2MBR1AFPM-12GLX	305±20	0.32	PE BAG: 5"6"0.06MM	100*1	A/R
RR-2MBR1AFPM-18GLX	610±20	0.475	PE BAG: 5"6"0.06MM	100*1	A/R

客戶料號

45

RR-2MBR1AFPM-XXGLX

15

貼P E袋正中間

*	300030000011	PE BAG: 2"3"0.06MM	1	PCS
*		LABEL: 45*15MM<白底黑字>	1	PCS
*	310000000011	CARTON: 46*30*20CM	A/R	PCS
*	300010000001	PE BAG: 30"28"0.08MM	A/R	PCS
*	300030000193	PE BAG: 5"6"0.06MM	1	PCS
10	220020000001	PVC-IN	2.0	G
9	240010700138	SRW: 5.4*9.8MM<全牙>	2	PCS
8	120010000116	PVC-BK10/30P	16.0	G
7	240020000008	NUTS: H4.75*2.0MM<4-40unc>	2	PCS
6	120020000001	PE-5321	3.0	G
5	200032000155	TUBE-HT-Ø1.0	5.0*3	MM
4	210030000057	HI TEAMP TAPE: W: 6MM	20*1	MM
3	110082304028	USB-A-S<WH>鐵殼鍍金	1	PCS
2	110081004126	MINI-USB-B-5PIN<BK>鐵殼鍍金<短型一件式>	1	PCS
1	1303041101293	30*1P+30*2C+A+B-BK10-3.0U2725	L	M
NO	PART NO.	DESCRIPTION	QTY	UNIT

NOTE:

REFUB2001023L21045

RoHS COMPLIANT


INNER MOLDING	USB.A051	A359KF		
OUTER MOLDING	USB.A327KF	A360KF		



THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY
 INFORMATION OF RB BUSINESS VENTURES, LLC. THE
 POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN
 CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO
 REVEAL OR PUBLISH IT IN WHOLE OR PART.
 COPYRIGHT © 2010

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
S	BRAID	S



ITEM: RR-2MBR1AFPM-XXGLX

REV
R

DRAWN,BY:

SCALE: NONE

DATE: 2014.2.18

CHECKED,BY:

CUSTOMER: C33K陸鴻

PAGE: 1/1

APP'ED,BY:

CUSTOMER P/N:

ALL DIMENSIONS IN mm